

SK

CEILING FAN HEATER



HEAT FROM ABOVE

The SK ceiling fan heater silently beams down heat from above. This unique model is ideal for rooms where wall space is limited. In bathrooms, the SK can be installed just outside the shower or bathtub. With its ceiling-recessed casing, the SK is an excellent way to provide discreet air circulation. The result: uniform heating and air movement, and reduction in mirror and window fog. By adding a wall timer, you can use it on demand.

■ CEILING MOUNTED

IDEAL FOR ROOMS WITH LIMITED
WALL SPACE

■ HEATING ON DEMAND

OPTIONAL WALL TIMER

■ COMPACT AND QUIET

■ 347 V MODEL AVAILABLE

COLOURS

- **standard:** white
- **Orora (optional):** refer to stelpro.com/orora/

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- 22-gauge steel cabinet and 1/4 in. (6.4 mm) deep 20-gauge steel front grille
- easy access for maintenance (no screws)

THERMAL PROTECTION

- thermal protection with automatic reset

ELEMENT

- nichrome element produces instant heat

CONTROL

- built-in thermostat (optional)
- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended
- 60 minute timer (optional)

INSTALLATION

- ceiling mounted (recommended height 8 ft., maximum 9 ft.)
- surface mounted with surface adapter (optional)
- recessed or surface mounted with adapter for suspended ceiling (optional)
- unit can be mounted parallel or perpendicular to ceiling beams
- approved to be recessed in mineral wool; for all other materials please check with insulating product manufacturer

WARRANTY

- five years

IDEAL FOR:

bathroom, entryway, daycare centre, room with limited wall space

°STELPRO

Stelpro reserves the right to modify at any time the description, manufacturing, or price of its products. Additionally, Stelpro may apply restocking fees or refuse a refund based on one or more of the following criteria: optional color, custom product, assembly with low-demand options. For the latest product information and prices regarding the products, please visit the website www.stelpro.com.

TECHNICAL SPECIFICATIONS

WITHOUT CONTROL		BUILT-IN THERMOSTAT		24 V CONTROL		POWER	VOLTAGE	FLOW	THROW DISTANCE		HEAT RISE		WEIGHT	
CODE	PRICE	CODE	PRICE	CODE	PRICE	WATTS	VOLTS	CFM	M	FT.	°C	°F	KG	LB
SK0501W	374.00	---	---	---	---	500	120	60	2.4	8	15	26	5	11
SK0508W	374.00	---	---	---	---	500	208	60	2.4	8	15	26	5	11
SK0502W	374.00	---	---	---	---	500/375	240/208	60	2.4	8	15	26	5	11
SK0503W	528.00	SK0503TW	640.00	SK0503C24W	663.00	500	347	60	2.4	8	15	26	5	11
SK0751W	374.00	---	---	---	---	750	120	60	2.4	8	22	39	5	11
SK0758W	374.00	---	---	---	---	750	208	60	2.4	8	22	39	5	11
SK0752W	374.00	---	---	---	---	750/560	240/208	60	2.4	8	22	39	5	11
SK0753W	528.00	SK0753TW	640.00	SK0753C24W	663.00	750	347	60	2.4	8	22	39	5	11
SK1001W	397.00	---	---	---	---	1000	120	60	2.4	8	29	53	5	11
SK1008W	397.00	---	---	---	---	1000	208	60	2.4	8	29	53	5	11
SK1002W	397.00	---	---	---	---	1000/750	240/208	60	2.4	8	29	53	5	11
SK1003W	552.00	SK1003TW	664.00	SK1003C24W	686.00	1000	347	60	2.4	8	29	53	5	11
SK1251W	421.00	---	---	---	---	1250	120	60	2.4	8	37	66	5	11
SK1258W	421.00	---	---	---	---	1250	208	60	2.4	8	37	66	5	11
SK1252W	421.00	---	---	---	---	1250/940	240/208	60	2.4	8	37	66	5	11
SK1253W	579.00	SK1253TW	690.00	SK1253C24W	712.00	1250	347	60	2.4	8	37	66	5	11
SK1501W	432.00	---	---	---	---	1500	120	60	2.4	8	44	79	5	11
SK1508W	432.00	---	---	---	---	1500	208	60	2.4	8	44	79	5	11
SK1502W	432.00	---	---	---	---	1500/1125	240/208	60	2.4	8	44	79	5	11
SK1503W	593.00	SK1503TW	704.00	SK1503C24W	728.00	1500	347	60	2.4	8	44	79	5	11
---	---	---	---	---	---	2000	120	90	3.2	10'6"	39	70	5	11
---	---	---	---	---	---	2000	208	90	3.2	10'6"	39	70	5	11
SK2002W	492.00	---	---	---	---	2000/1500	240/208	90	3.2	10'6"	39	70	5	11
SK2003W	662.00	SK2003TW	772.00	SK2003C24W	795.00	2000	347	90	3.2	10'6"	39	70	5	11

Consult the optional colours chart or contact your Stelpro representative for all other colours.

Models also available in 277 V.


--- not available

ACCESSORIES

PRODUCT	DESCRIPTION	PRICE
SKT1*	tamper-proof built-in thermostat [120 V-347 V] (grille must be removed to access this type of thermostat)	94.00
SKTBAW	adapter for suspended ceiling (2 ft. x 2 ft.) – recessed or surface mounted with surface adapter (not included)	152.00
SKSAW	surface adapter (SK model)	133.00
FD60MCW70	60 minute wall timer [120 V-277 V]	104.00
SKRE153T*	built-in electronic low voltage relay c/w transformer 24 V [15 A @ 208 V-347 V]	194.00

* Factory installed

TECHNICAL DRAWINGS

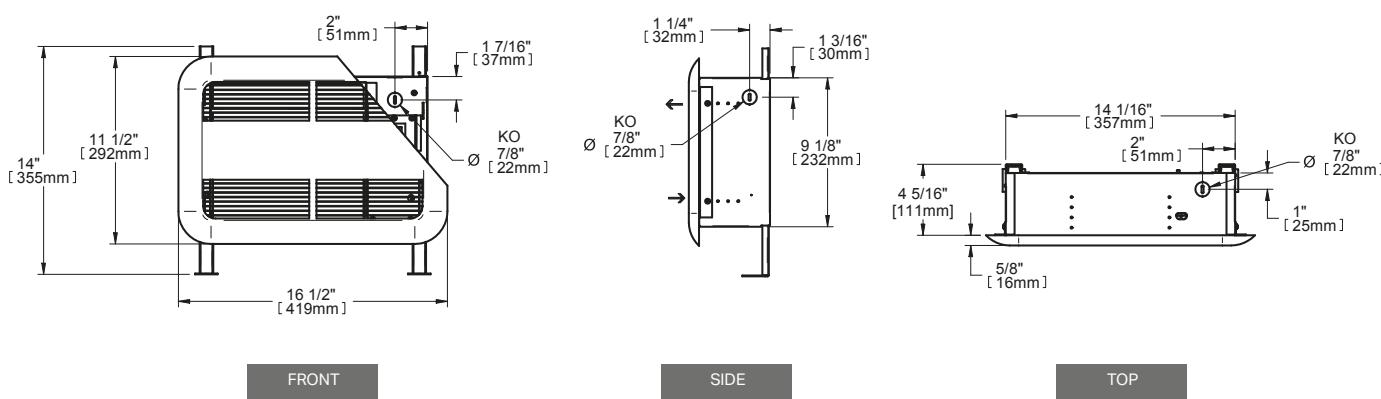



Stelpro reserves the right to modify at any time the description, manufacturing, or price of its products. Additionally, Stelpro may apply restocking fees or refuse a refund based on one or more of the following criteria: optional color, custom product, assembly with low-demand options. For the latest product information and prices regarding the products, please visit the website www.stelpro.com.