

SWU

WASHDOWN UNIT HEATER



RELIABLE, RESISTANT AND SELF-CONTAINED

The Stelpro SWU washdown unit heater is the perfect solution to the problem of comfort heating in environments where moisture and corrosion exist. The washdown heater is corrosion resistant, totally enclosed and watertight making it ideal for industrial heating applications. Available in several wattages (2 kW to 47 kW) and voltages (120 V, 208 V, 240 V and 480 V) this rugged unit will meet your toughest needs.

DESIGNED FOR HEATING LOCATIONS WHERE MOISTURE AND CORROSION EXIST

CORROSION-RESISTANT STAINLESS STEEL CONSTRUCTION

WASHABLE WATERTIGHT CONSTRUCTION

LARGE SELECTION OF MODELS SEVERAL WATTAGES, VOLTAGES AND PHASES

FINISH

- stainless steel

MANUFACTURING

- heavy 16-gauge stainless steel housing
- adjustable stainless steel louvers (can be rotated 90°)
- non-metallic control enclosure (meets NEMA 4X hose-down requirements)
- thermal protection with automatic reset

MOTOR

- totally enclosed, epoxy-coated and permanently lubricated ball bearing motor
- powder-coated aluminum fan blade

ELEMENTS

- industrial grade, type 316 stainless steel tubular elements with stainless steel fins

CONTROL

- factory mounted
- housed in a non-metallic enclosure
- includes a thermal protection with automatic reset, fan delay relay, controlling contactor transformer for 24 V control circuit, terminal block for field wiring and a separate motor contactor that can be used when required

INSTALLATION

- wall or ceiling mounted with stainless steel swivel mounting bracket (included)
- ceiling mounted with 4 3/8-16 threaded rods (not provided – if the swivel mounting bracket is not required, choose the SWU-B or SWU-B1 options)

WARRANTY

- one year

IDEAL FOR:

car wash, steel mill and foundry, cement plant, wood finishing plant, dairy, food processing plant, marine installation, power station, wastewater treatment plant, swimming pool area

°STELPRO

Stelpro reserves the right to modify descriptions, manufacturing specifications or prices without prior notice. No returns accepted on optional-color products. For all the latest models and prices, please refer to our website at www.stelpro.com.



TECHNICAL SPECIFICATIONS

WITHOUT CONTROL	BUILT-IN THERMOSTAT	POWER		VOLTAGE	PHASE	AMPERAGE	MOTOR	APPROX. AIR TEMPERATURE RISE (DELTA ΔT)
		KW	BTU/H	VOLTS	NB.	AMPERES	HP	°F
SWU0211	SWU0211-T	2	6825	120	1	21	1/4	9
SWU0281	SWU0281-T	2	6825	208	1	12	1/4	9
SWU0221	SWU0221-T	2	6825	240	1	11	1/4	9
SWU0311	SWU0311-T	3	10238	120	1	29	1/4	14
SWU0381	SWU0381-T	3	10238	208	1	17	1/4	14
SWU0321	SWU0321-T	3	10238	240	1	15	1/4	14
SWU0351	SWU0351-T	3	10238	480	1	8	1/4	14
SWU0383	SWU0383-T	3	10238	208	3	8	1/4	14
SWU0323	SWU0323-T	3	10238	240	3	11	1/4	14
SWU0353	SWU0353-T	3	10238	480	3	5	1/4	14
SWU0581	SWU0581-T	5	17064	208	1	27	1/4	24
SWU0521	SWU0521-T	5	17064	240	1	23	1/4	24
SWU0551	SWU0551-T	5	17064	480	1	12	1/4	24
SWU0583	SWU0583-T	5	17064	208	3	12	1/4	24
SWU0523	SWU0523-T	5	17064	240	3	16	1/4	24
SWU0553	SWU0553-T	5	17064	480	3	15	1/4	24
SWU0881	SWU0881-T	7.5	25595	208	1	39	1/4	35
SWU0821	SWU0821-T	7.5	25595	240	1	34	1/4	35
SWU0851	SWU0851-T	7.5	25595	480	1	17	1/4	35
SWU0883	SWU0883-T	7.5	25595	208	3	23	1/4	35
SWU0823	SWU0823-T	7.5	25595	240	3	21	1/4	35
SWU0853	SWU0853-T	7.5	25595	480	3	11	1/4	35
SWU0981	SWU0981-T	9	30714	208	1	46	1/4	20
SWU0921	SWU0921-T	9	30714	240	1	40	1/4	20
SWU0951	SWU0951-T	9	30714	480	1	20	1/4	20
SWU0983	SWU0983-T	9	30714	208	3	28	1/4	20
SWU0923	SWU0923-T	9	30714	240	3	24	1/4	20
SWU0953	SWU0953-T	9	30714	480	3	12	1/4	20
SWU1021	SWU1021-T	10	34127	240	1	44	1/4	22
SWU1051	SWU1051-T	10	34127	480	1	22	1/4	22
SWU1083	SWU1083-T	10	34127	208	3	22	1/4	22
SWU1023	SWU1023-T	10	34127	240	3	27	1/4	22
SWU1053	SWU1053-T	10	34127	480	3	14	1/4	22
SWU1251	SWU1251-T	12	40952	480	1	27	1/4	26
SWU1283	SWU1283-T	12	40952	208	3	36	1/4	26
SWU1223	SWU1223-T	12	40952	240	3	32	1/4	26
SWU1253	SWU1253-T	12	40952	480	3	16	1/4	26
SWU1383	SWU1383-T	12.5	42659	208	3	37	1/4	17
SWU1323	SWU1323-T	12.5	42659	240	3	33	1/4	17
SWU1353	SWU1353-T	12.5	42659	480	3	17	1/4	17
SWU1583	SWU1583-T	15	51191	208	3	44	1/4	21
SWU1523	SWU1523-T	15	51191	240	3	39	1/4	21
SWU1553	SWU1553-T	15	51191	480	3	20	1/4	21
SWU2053	SWU2053-T	20	68254	480	3	26	1/4	28
SWU2553	SWU2553-T	25	85318	480	3	32	1/4	35
SWU3053	SWU3053-T	30	102381	480	3	38	1/4	42
SWU3553	SWU3553-T	35	119445	480	3	44	1/4	48
SWU3853	SWU3853-T	38.4	131048	480	3	48	1/4	54


DIMENSIONS, AIRFLOWS AND WEIGHT		KW		
		FROM 2 TO 7.5	FROM 7.6 TO 12	FROM 12.1 TO 47
OVERALL HEATER DIMENSIONS	"X" INCH	15.5	15.5	26
	"Y" INCH	21.5	21.5	28
	"Z" INCH	13	13	20
MOUNTING HOLE DIMENSIONS	"BH" INCH	4.25	4.25	7.125
	"BL" INCH	19.5	19.5	22.25
	"M" INCH	8.5	8.5	3.25
AIRFLOW CHARACTERISTICS	AIR VOLUME CFM	700	1450	2400
	AIR THROW FEET	26	43	50
	OUTLET VELOCITY FPM	760	1575	1200
WEIGHT	NET LB	56	56	115
	SHIPPING LB	70	70	130

OPTIONS AND ACCESSORIES

CODE	DESCRIPTION
SWU-B	swivel mounting bracket not included; option when field furnished threaded rods are used for units up to 12 kW
SWU-B1	swivel mounting bracket not included; option when field furnished threaded rods are used for units over 12 kW
SWU-D*	power disconnect switch
SWU-L*	"heater on" pilot light
SWU-M*	secondary manual reset/thermal protection
SWU-S*	three-position selector switch (heater-standby-fan)
SWU-V*	120 volt control circuit
SWUT1	washdown/corrosion resistant wall-mounted thermostat for non-hazardous locations 4°C-38°C (40°F-100°F) range
SWU-E*	monel finned tubular elements (up to 20 kW)
SWU-E1*	monel finned tubular elements (25 kW to 47 kW)

* Factory installed

TECHNICAL DRAWINGS AND INSTALLATION

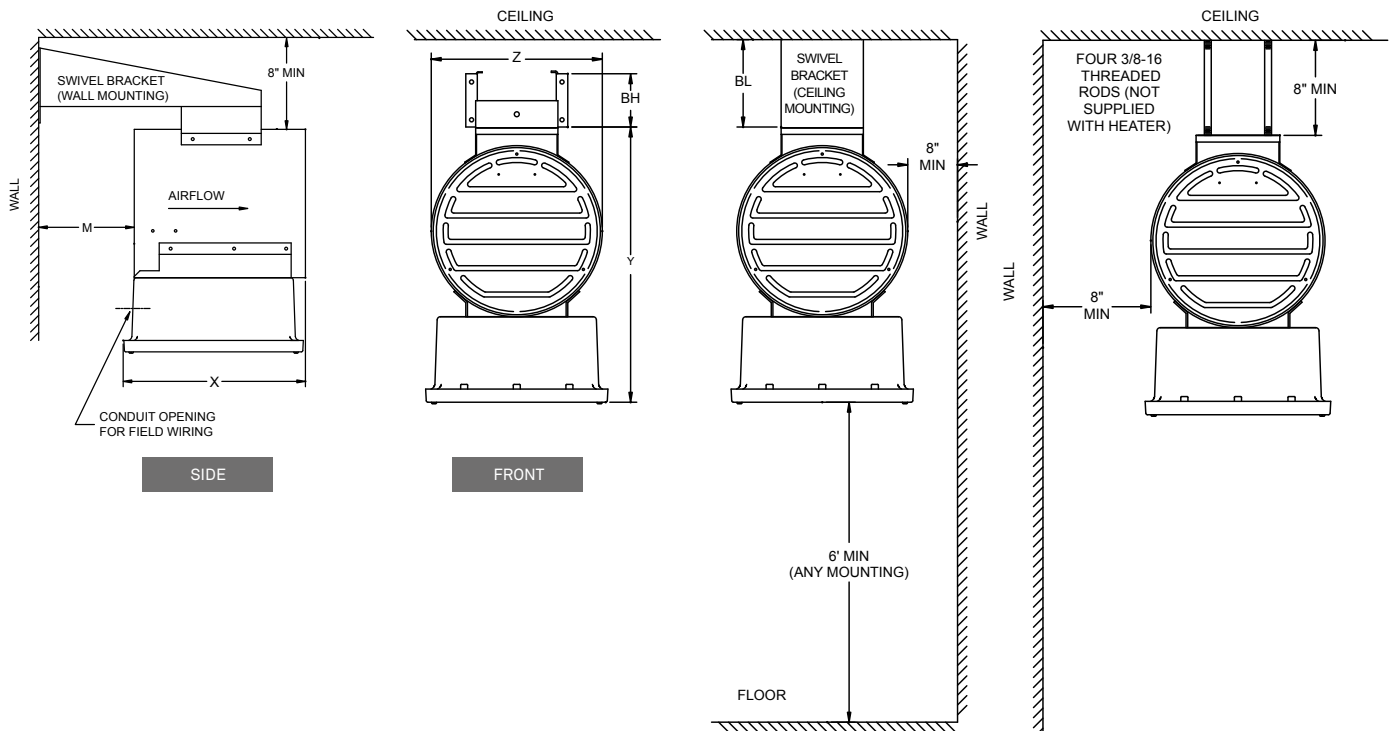



Stelpro reserves the right to modify descriptions, manufacturing specifications or prices without prior notice. No returns accepted on optional-color products. For all the latest models and prices, please refer to our website at www.stelpro.com.