

# SYLVANIA Lamps

## ULTRA LED™ Glass PAR Lamps

ULTRA LED Glass PAR lamps are ideal for recessed downlights, track lighting, wall wash and general lighting applications in hospitality, office, property management, residential, restaurant, retail and school environments.

### Benefits and Features

- Longer life than traditional halogen lamps
- No warm-up time, instant on with full light output and stable color
- Glass body with full optics – similar to halogen PAR lamps
- Rated for use in enclosed fixtures
- Up to 83 LPW
- Color temperature available in 2700K, 3000K, 4000K and 5000K
- Dimmable\*
- CRI >80
- Available beam angles: 12°, 25°, 40°

\* Performance may vary depending on dimmer used in application. Please refer to Dimmer Compatibility List (RETRO-DIM) for a list of compatible dimmers or visit [www.SYLVANIA.com/LED Retrofit](http://www.SYLVANIA.com/LED Retrofit)

### Electrical

- 120V
- Power factor 95%

### Rated Life

- 25,000 and 15,000 hours (L<sub>70</sub>)

### Warranty

- Standard 5 year lamp warranty

### Ambient Operating Range

- -20°C to +45°C (-4°F to 113°F)

### Certifications and Listings

- UL Wet rated
- ETL Food Safe Listed
- ENERGY STAR®

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, please see [www.sylvania.com/fcc15b](http://www.sylvania.com/fcc15b).

Item #
Type
Project
Notes
Date



### Wattage Comparison

Product Description	Similar Halogen	Wattage Saved	Energy Savings
LED 7W PAR20	50W	43	86%
LED 10W PAR30	75W	65	86%
LED 10W PAR30LN	75W	65	86%
LED 14W PAR38	100W	76	86%
LED 16W PAR38	120W	104	86%



## Ordering Guide

LED	XX	PAR38	/	DIM	/	8	30	/	FL	40	/	XXY	/	GL3	/	W
LED Lamps and Retrofits	Wattage: 7, 10, 11, 13, 14, 15, 16	Lamp Type: PAR38, PAR30LN, PAR30, PAR20	/	Dimmable	/	CRI = 80+	Color Temperature: 2700K, 3000K, 4000K, 5000K	/	Flood	Beam Angle: 12°, 25°, 40°	/	Life (hrs): 22Y = 25,000, 13Y = 15,000	/	Glass Lamps	/	Wet Rated

## Ordering Information


Item Number	Ordering Abbreviation	Wattage (W)	Replaces	Voltage (V)	Input Beam Angle	CBCP	Average Rated Life (hrs.) <sup>1</sup>	CCT <sup>2</sup>	CRI <sup>3</sup>	Typical Lumens (lm) <sup>4</sup>	Power Factor	ENERGY STAR®
78349	LED7PAR20/DIM/827/NFL25/22Y/GL3/W/RP 6/CS 1/SKU	7	50W	120V	25	1700	25,000	2700K	82	525	0.95	Yes
78350*	LED7PAR20/DIM/827/FL40/22Y/GL3/W/RP 6/CS 1/SKU	7	50W	120V	40	1200	25,000	2700K	82	525	0.95	Yes
41045	LED7PAR20DIM827FL4013YGLWRP 6/CS 1/SKU	7	50W	120V	40	970	15,000	2700K	82	525	0.95	Yes
78347*	LED7PAR20/DIM/830/NFL25/22Y/GL3/W/RP 6/CS 1/SKU	7	50W	120V	25	1700	25,000	3000K	82	525	0.95	Yes
41047	LED7PAR20DIM830FL4013YGLWRP 6/CS 1/SKU	7	50W	120V	40	970	15,000	3000K	82	500	0.95	Yes
40216	LED7PAR20DIM830FL4013YGLWCV 24/CS 24/SK	7	50W	120V	40	700	15,000	3000K	81	500	0.95	Yes
41046	LED7PAR20DIM830NFL2513YGLWRP 6/CS 1/SKU	7	50W	120V	25	970	15,000	3000K	82	525	0.95	Yes
41048	LED7PAR20DIM840FL4013YGLWRP 6/CS 1/SKU	7	50W	120V	40	970	15,000	3000K	82	525	0.95	Yes
78346*	LED7PAR20/DIM/840/FL40/22Y/GL3/W/RP 6/CS 1/SKU	7	50W	120V	40	1200	25,000	4000K	82	525	0.95	Yes
74777	LED7PAR20/DIM/850/FL40/13Y/GL/W/RP 6/CS 1/SKU	7	50W	120V	40	700	15,000	5000K	81	550	0.95	Yes
79784*	LED10PAR30/DIM/830/FL40/22Y/GL3/W/RP 6/CS 1/SKU	10	75W	120V	40	1500	25,000	3000K	82	825	0.95	Yes
79783*	LED10PAR30/DIM/830/NFL25/22Y/GL3/W/RP 6/CS 1/SKU	10	75W	120V	25	3200	25,000	3000K	82	825	0.95	Yes
78251*	LED10PAR30LN/DIM/827/NFL25/22Y/GL3/W/RP 6/CS 1/SKU	10	75W	120V	25	3200	25,000	2700K	82	825	0.95	Yes
78252*	LED10PAR30LN/DIM/827/FL40/22Y/GL3/W/RP 6/CS 1/SKU	10	75W	120V	40	1500	25,000	2700K	82	825	0.95	Yes
78249*	LED10PAR30LN/DIM/830/NFL25/22Y/GL3/W/RP 6/CS 1/SKU	10	75W	120V	25	3200	25,000	3000K	82	825	0.95	Yes
78248*	LED10PAR30LN/DIM/840/FL40/22Y/GL3/W/RP 6/CS 1/SKU	10	75W	120V	40	1500	25,000	4000K	82	825	0.95	Yes
41051	LED11PAR30LNDIM827FL4013YGLWRP 6CS 1SKU	11	75W	120V	40	1592	15,000	2700K	82	850	0.95	Yes
41049	LED11PAR30DIM830FL4013YGLWRP 6/CS 1/SKU	11	75W	120V	40	1592	15,000	3000K	82	850	0.95	Yes
41050	LED11PAR30DIM830NFL2513YGLWRP 6/CS 1/SKU	11	75W	120V	25	4470	15,000	3000K	82	850	0.95	Yes
41052	LED11PAR30LNDIM830NFL2513YGLWR 6CS 1SKU	11	75W	120V	25	4470	15,000	3000K	82	850	0.95	Yes
41053	LED11PAR30LNDIM830FL4013YGLWRP 6CS 1SKU	11	75W	120V	40	1592	15,000	3000K	82	850	0.95	Yes
41054	LED11PAR30LNDIM840FL4013YGLWRP 6CS 1SKU	11	75W	120V	40	1592	15,000	4000K	82	850	0.95	Yes
74603	LED11PAR30LN/DIM/850/FL40/13Y/GL/W/RP 6/CS 1/SKU	11	75W	120V	40	1375	15,000	5000K	82	850	0.95	Yes
74947	LED13PAR38DIM830FL4013YGLWRP 6/CS 1/SKU	13	100W	120V	40	1800	15,000	3000K	82	1050	0.95	Yes
41056	LED14PAR38DIM827FL4013YGLW 6/CS 1/SKU	14	100W	120V	40	1986	15,000	2700K	82	1050	0.95	Yes
41055	LED14PAR38DIM827NFL2513YGLWRP 6/CS 1/SKU	14	100W	120V	25	5440	15,000	2700K	82	1050	0.95	Yes
41058	LED14PAR38DIM830FL4013YGLW 6/CS 1/SKU	14	100W	120V	40	1986	15,000	3000K	82	1050	0.95	Yes
41057	LED14PAR38DIM830NFL2513YGLWRP 6/CS 1/SKU	14	100W	120V	25	5440	15,000	3000K	82	1050	0.95	Yes
74946*	LED14PAR38/DIM/840/FL40/22Y/GL3/W/RP 6/CS 1/SKU	14	100W	120V	40	2400	25,000	4000K	82	1050	0.95	Yes
41059	LED14PAR38DIM840FL4013YGLW 6/CS 1/SKU	14	100W	120V	40	1986	15,000	4000K	82	1050	0.95	Yes
74948	LED14PAR38/DIM/850/FL40/13Y/GL/W/RP 6/CS 1/SKU	14	100W	120V	40	1800	15,000	5000K	82	1050	0.95	Yes
41060	LED15PAR38DIM830FL4013YGLWRP 6/CS 1/SKU	15	100W	120V	40	2441	15,000	3000K	82	1300	0.95	Yes
41061	LED15PAR38DIM830NFL2513YGLWRP 6/CS 1/SKU	15	120W	120V	25	6170	15,000	3000K	80	1300	0.95	Yes
41113	LED15PAR38DIM840FL4013YGLWRP 6/CS 1/SKU	15	100W	120V	40	2441	15,000	4000K	82	1300	0.95	Yes
74940*	LED16PAR38/DIM/830/NFL25/22Y/GL3/W/RP 6/CS 1/SKU	16	120W	120V	25	6500	25,000	3000K	82	1300	0.95	Yes
74941*	LED16PAR38/DIM/830/FL40/22Y/GL3/W/RP 6/CS 1/SKU	16	120W	120V	40	3200	25,000	3000K	82	1300	0.95	Yes
74950	LED16PAR38/DIM/850/FL40/13Y/GL/W/RP 6/CS 1/SKU	16	120W	120V	40	2300	15,000	5000K	82	1300	0.95	Yes

1. Hours lifetime with 70% lumen maintenance
2. Thermally stable typical CCT (±10%)
3. CRI – Color Rendering Index (typical)
4. Thermally stable typical lumens (±10%)

\*Once this item runs out of stock, inventory will be depleted.

## Physical Information

Lamp Description	(A) MOL	(B) Diameter
LED PAR20	3.27 in	2.51 in
LED PAR30	3.34 in	3.74 in
LED PAR30LN	4.44 in	3.74 in
LED PAR38	5.11 in	4.80 in

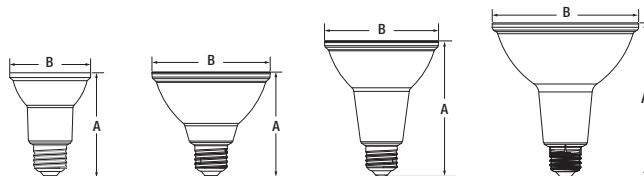

## Additional Specification Information

– Not for use with emergency light fixtures or exit lights.

## Dimmer Compatibility

Dimmer Manufacturer	Dimmer Model	Control Type <sup>1</sup>	Item Number					
			7W		10W		11W	
			Dimmer Min-Max <sup>2</sup>	Dimming Range <sup>3</sup>	Dimmer Min-Max <sup>2</sup>	Dimming Range <sup>3</sup>	Dimmer Min-Max <sup>2</sup>	Dimming Range <sup>3</sup>
			78349, 78350, 78347, 78348, 78346, 74777		79784, 79783, 78251, 78252, 78249, 78250, 78248		74603	
Lutron	C.L. <sup>4</sup>	FP	1 to 21	10-100%	1 to 15	10-100%	1 to 13	10-100%
	MACL-153M	FP	1 to 21	10-100%	1 to 15	10-100%	1 to 13	10-100%
	PD-6WCL	FP	1 to 21	10-100%	1 to 15	10-100%	1 to 13	10-100%
	DVELV-300P	RP	1 to 26	10-100%	1 to 20	10-100%	1 to 18	10-100%
	SELV-300P	RP	1 to 26	10-100%	1 to 20	10-100%	1 to 18	10-100%
	MAELV-600	RP	1 to 26	10-100%	1 to 20	10-100%	1 to 18	10-100%
Leviton	6674	FP	1 to 21	10-100%	1 to 15	10-100%	1 to 13	10-100%
Legrand	RHCL-453PW	FP	1 to 21	10-100%	1 to 15	10-100%	1 to 13	10-100%

Dimmer Manufacturer	Dimmer Model	Control Type <sup>1</sup>	Item Number					
			13W		14W		16W	
			Dimmer Min-Max <sup>2</sup>	Dimming Range <sup>3</sup>	Dimmer Min-Max <sup>2</sup>	Dimming Range <sup>3</sup>	Dimmer Min-Max <sup>2</sup>	Dimming Range <sup>3</sup>
			74948		74944, 74945, 74036, 74942, 74943, 74946		74940, 74941, 7495	
Lutron	C.L. <sup>4</sup>	FP	1 to 11	10-100%	1 to 10	10-100%	1 to 9	10-100%
	MACL-153M	FP	1 to 11	10-100%	1 to 10	10-100%	1 to 9	10-100%
	PD-6WCL	FP	1 to 11	10-100%	1 to 10	10-100%	1 to 9	10-100%
	DVELV-300P	RP	1 to 16	10-100%	1 to 15	10-100%	1 to 14	10-100%
	SELV-300P	RP	1 to 16	10-100%	1 to 15	10-100%	1 to 14	10-100%
	MAELV-600	RP	1 to 16	10-100%	1 to 15	10-100%	1 to 14	10-100%
Leviton	6674	FP	1 to 11	10-100%	1 to 10	10-100%	1 to 9	10-100%
Legrand	RHCL-453PW	FP	1 to 11	10-100%	1 to 10	10-100%	1 to 9	10-100%

<sup>1</sup>Control types FP and RP represent Forward Phase and Reverse Phase, respectively.

<sup>2</sup>Maximum lamps per dimmer value represents the maximum safe loading of the control.

<sup>3</sup>Values are based on light output using the specified dimming control, and may not be an indication of the fixture's full rated capability.

<sup>4</sup>Includes models DVCL/TGCL/AYCL/ISCL/CTCL/LECL

LEDVANCE LLC  
200 Ballardvale Street  
Wilmington, MA 01887 USA  
Phone 1-800-LIGHTBULB (1-800-544-4828)  
www.ledvanceUS.com

Name:

Email:

Phone:

SYLVANIA and LEDVANCE are registered trademarks.  
All other trademarks are those of their respective owners.  
Licensee of product trademark SYLVANIA in general lighting.  
Specifications subject to change without notice.

 /sylvania  /sylvania

