

SYLVANIA Luminaires

Bulkhead



Product Features

The Bulkhead luminaires are environmentally preferable LED alternatives to traditional luminaires, offering up to 87% in energy savings. Ideal in place of traditional luminaires, or as new installations, the Bulkhead series is offered with one lumen package for illuminating building exteriors, outdoor corridors, walkways, and stairwells.


The traditionally styled luminaire allows for easy installation. SYLVANIA luminaires assure optimum light engine performance for extended service and rated life ($\geq 90,000$ hours L₇₀).

Wattage Comparison Chart

Traditional Source	Traditional System Wattage	LED System Wattage	Energy Savings
60W Inc	60	10	83%
13W CFL	13	10	23%
75W Inc	75	10	87%
20W CFL	20	10	50%

Catalog #	Type
Project	
Notes	
Date	
Prepared by	

Dimensions

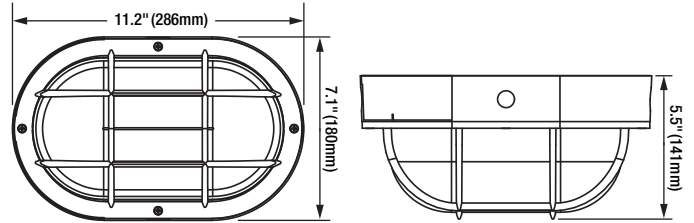

Specifications

Weight: 4.00lb (1.183kg)

Construction: Die Cast aluminum housing with powder coat paint. The standard color is black.

LED System: LED system with a life rating of $>90,000$ hours at L₇₀ @ 25°C. Luminaire efficacy up to 90 LPW.

Electrical: Offered in 10 watts, the luminaire is designed to operate through the 120-277 V_{AC} universal voltage range. The LED driver is a constant current device. The power factor is $\geq 90\%$ and THD is $\leq 20\%$.

Color Characteristics: CRI >80 ; CCT of 4000K or 5000K.

Optics: UV resistant polycarbonate lens.

Installation: Luminaire mounts to recessed outlet box.

Operating Temperature: -40°F to +104°F (-40°C to +40°C).

Listings: cULus classified to UL1598C rated for wet locations.

Warranty: Standard 5-year luminaire warranty (LEDLUM001).

Note: Specifications subject to change without notice. IES files available online.



Ordering Guide

Item Number:


<input type="text"/>	<input type="text"/>	/	<input type="text"/>	<input type="text"/>	<input type="text"/>		<input type="text"/>	/	<input type="text"/>		<input type="text"/>
BULKHED	1A		010	UNV	8		XX		XX		BL
Product Name	Generation		Wattage	Voltage	CRI		Color Temp (CCT)		Mounting		Color/Finish
BULKHED	1A		010 = 10W	UNV = 120-277V	8 >80		40 = 4000K 50 = 5000K		SM = Surface Mount		BL = Black



Photometric Data

BULKHED1A010UNV840SMBL

Isofootcandle Lines at 10' Mounting Height



For other mounting heights apply the following multipliers:

Mounting Height	6'	8'	10'	12'	15'
Multiplier	2.8	1.6	1.00	0.69	0.44

Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Input Voltage	CRI	Color Temp (CCT)	Distribution	Lumens	LPW	Mounting
60206	BULKHED1A/010UNV840/SM/BL	10	120-277	>80	4000K	Type V	900	90	Surface
60207	BULKHED1A/010UNV850/SM/BL	10	120-277	>80	5000K	Type V	900	90	Surface

LEDVANCE LLC
 200 Ballardvale Street
 Wilmington, MA 01887 USA
 Phone 1-800-LIGHTBULB (1-800-544-4828)
www.sylvania.com

SYLVANIA and LEDVANCE are registered trademarks.
 All other trademarks are those of their respective owners.
 Licensee of product trademark SYLVANIA in general lighting.
 Specifications subject to change without notice.

[/sylvania](https://twitter.com/sylvania) [/sylvania](https://facebook.com/sylvania)

