

SYLVANIA Luminaires

ValueLED™ Non-Cutoff Wall Pack

Item #
Type
Project
Notes
Date

Application

The SYLVANIA ValueLED Wall Pack luminaires are environmentally preferable LED alternatives to traditional HID luminaires, offering up to 77% in energy savings. Ideal in place of traditional luminaires, or as new installations, the Wall Pack series is offered in several wattages/lumen packages for illuminating building exteriors, outdoor corridors, walkways, and stairwells.

Benefits and Features

- DLC listing maximizes rebate opportunities
- Traditional appearance allows for lowered installation costs
- Wide operating temperature (-40°C to +40°C) enables this product to be used in a variety of outdoor environments
- Up to 145 LPW
- 4000K and 5000K color temperature
- CRI >80
- Offered in 30, 50, 60, and 120 watts
- Energy savings up to 77%

Electrical

- 120-277VAC
- Power Factor >90%
- THD <20%
- 0-10V dimmable

Rated Life

- 50,000 hours (L₇₀)

Warranty

- 5-year

Ambient Operating Range

- -40°F to 104°F (-40°C to 40°C)

Certifications and Listings

- cULus*
- RoHS
- FCC
- DLC

*cULus listed to UL1598 standards for wet locations



Wattage Comparison

Traditional Source	Traditional System Wattage	LED System Wattage	Energy Savings
70W HPS	91	30	67%
100W HPS	120	30	75%
100W MH	130	30	77%
70W HPS	91	50	45%
100W HPS	120	50	58%
100W MH	130	50	62%
150W HPS	170	60	65%
150W MH	188	60	68%
175W MH	210	60	71%
175W MH	210	80	62%
250W MH	290	80	72%
250W HPS	295	80	73%
320W MH	370	120	68%
400W HPS	460	120	74%
400W MH	450	120	73%

Installation

- Luminaire mounts to exterior wall.



Ordering Guide

WALPAKN	XX	/ XXX	UNV	X	8	XX	/ NC	/ BZ	/ X
Product Name	Gen/Size	Wattage	Voltage	Dimming	CRI	Color Temp	Distribution	Color/Finish	Options
WALPAKN = Non-Cutoff Wall Pack	4A ¹ , 4B ² , 4C ³	030 = 30 Watts 050 = 50 Watts 060 = 60 Watts 080 = 80 Watts 120 = 120 Watts	UNV = 120-277V	Blank = non dimmable D = 0-10V	8 = >80	40 = 4000K 50 = 5000K	NC = Non-Cutoff	BZ= Bronze	Blank = No options P = Photocontrol E = Emergency Battery Back-up

1. 30W only
2. 50W, 60W, 80W only
3. 120W only


Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Dimming	Input Voltage (V)	CRI	CCT	BUG Rating	Total Fixture Lumens (lm)	DLC*	LPW	Color	Options	MTO**
61656	WALPAKN4A/030UNV840/NC/BZ	30	–	120-277	80	4000K	B1-U3-G3	4050	Std	138	Bronze	–	–
62232	WALPAKN4A/030UNVD840/NC/BZ	30	0-10V	120-277	80	4000K	B1-U3-G3	4110	Std	135	Bronze	–	–
61657	WALPAKN4A/030UNV850/NC/BZ	30	–	120-277	80	5000K	B1-U3-G3	4100	Std	136	Bronze	–	–
62233	WALPAKN4A/030UNVD850/NC/BZ	30	0-10V	120-277	80	5000K	B1-U3-G3	4140	Std	136	Bronze	–	–
61648	WALPAKN4B/050UNV840/NC/BZ	50	–	120-277	80	4000K	B1-U4-G4	7000	Std	145	Bronze	–	–
62239	WALPAKN4B/050UNVD840/NC/BZ	50	0-10V	120-277	80	4000K	B1-U4-G4	7020	Std	145	Bronze	–	–
61649	WALPAKN4B/050UNV850/NC/BZ	50	–	120-277	80	5000K	B1-U4-G4	7000	Std	145	Bronze	–	–
62240	WALPAKN4B/050UNVD850/NC/BZ	50	0-10V	120-277	80	5000K	B1-U4-G4	7050	Std	145	Bronze	–	–
61650	WALPAKN4B/060UNVD840/NC/BZ	60	0-10V	120-277	80	4000K	B1-U4-G5	8500	Std	140	Bronze	–	–
61651	WALPAKN4B/060UNVD850/NC/BZ	60	0-10V	120-277	80	5000K	B1-U4-G5	8500	Std	142	Bronze	–	–
61652	WALPAKN4B/080UNVD840/NC/BZ	80	0-10V	120-277	80	4000K	B2-U5-G5	11,300	Std	144	Bronze	–	–
61653	WALPAKN4B/080UNVD850/NC/BZ	80	0-10V	120-277	80	5000K	B2-U5-G5	11,300	Std	143	Bronze	–	–
61654	WALPAKN4C/120UNVD840/NC/BZ	120	0-10V	120-277	80	4000K	B3-U4-G5	16,200	Prm	137	Bronze	–	–
61655	WALPAKN4C/120UNVD850/NC/BZ	120	0-10V	120-277	80	5000K	B3-U4-G5	16,200	Prm	139	Bronze	–	–
65535	WALPAKN4A/030UNV840/NC/BZ/P	30	–	120-277	80	4000K	B1-U3-G3	4050	Std	138	Bronze	Photocontrol	Yes
65536	WALPAKN4A/030UNV850/NC/BZ/P	30	–	120-277	80	5000K	B1-U3-G3	4100	Std	136	Bronze	Photocontrol	Yes
65529	WALPAKN4B/050UNV840/NC/BZ/P	50	–	120-277	80	4000K	B1-U4-G4	7000	Std	145	Bronze	Photocontrol	Yes
65530	WALPAKN4B/050UNV850/NC/BZ/P	50	–	120-277	80	5000K	B1-U4-G4	7000	Std	145	Bronze	Photocontrol	Yes
65531	WALPAKN4B/060UNVD840/NC/BZ/P	60	0-10V	120-277	80	4000K	B1-U4-G5	8500	Std	140	Bronze	Photocontrol	Yes
65532	WALPAKN4B/060UNVD850/NC/BZ/P	60	0-10V	120-277	80	5000K	B1-U4-G5	8500	Std	142	Bronze	Photocontrol	Yes
65533	WALPAKN4B/080UNVD840/NC/BZ/P	80	0-10V	120-277	80	4000K	B2-U5-G5	11,300	Std	144	Bronze	Photocontrol	Yes
65534	WALPAKN4B/080UNVD850/NC/BZ/P	80	0-10V	120-277	80	5000K	B2-U5-G5	11,300	Std	143	Bronze	Photocontrol	Yes
65537	WALPAKN4C/120UNVD840/NC/BZ/P	120	0-10V	120-277	80	4000K	B3-U4-G5	16,200	Prm	137	Bronze	Photocontrol	Yes
65538	WALPAKN4C/120UNVD850/NC/BZ/P	120	0-10V	120-277	80	5000K	B3-U4-G5	16,200	Prm	139	Bronze	Photocontrol	Yes
62113	WALPAKN4B/050UNV840/NC/BZ/E	50	–	120-277	80	4000K	B1-U4-G4	7000	Std	145	Bronze	Emergency Battery Back-up	Yes
62114	WALPAKN4B/050UNV850/NC/BZ/E	50	–	120-277	80	5000K	B1-U4-G4	7000	Std	145	Bronze	Emergency Battery Back-up	Yes
62115	WALPAKN4B/060UNVD840/NC/BZ/E	60	0-10V	120-277	80	4000K	B1-U4-G5	8500	Std	140	Bronze	Emergency Battery Back-up	Yes
62116	WALPAKN4B/060UNVD850/NC/BZ/E	60	0-10V	120-277	80	5000K	B1-U4-G5	8500	Std	142	Bronze	Emergency Battery Back-up	Yes
62117	WALPAKN4B/080UNVD840/NC/BZ/E	80	0-10V	120-277	80	4000K	B2-U5-G5	11,300	Std	144	Bronze	Emergency Battery Back-up	Yes
62118	WALPAKN4B/080UNVD850/NC/BZ/E	80	0-10V	120-277	80	5000K	B2-U5-G5	11,300	Std	143	Bronze	Emergency Battery Back-up	Yes


*Prm for DLC Premium; Std for DLC Standard
**Made To Order

Photometric Data


WALPAK4A 30W

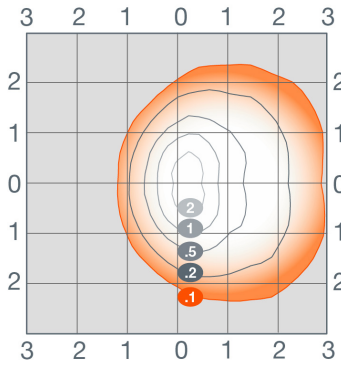


WALPAK4A 50W

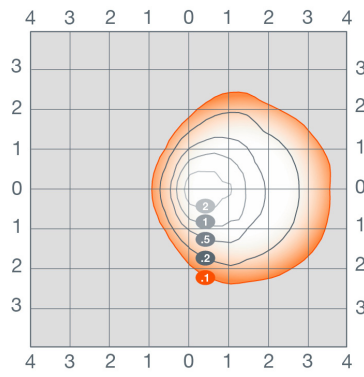


WALPAK4A 60W

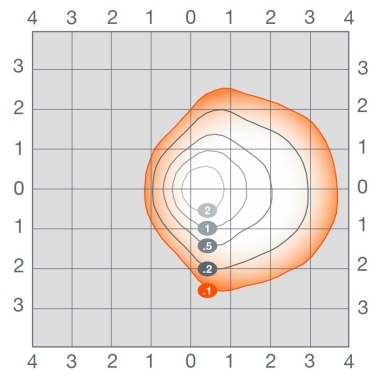

WALPAK4A 80W

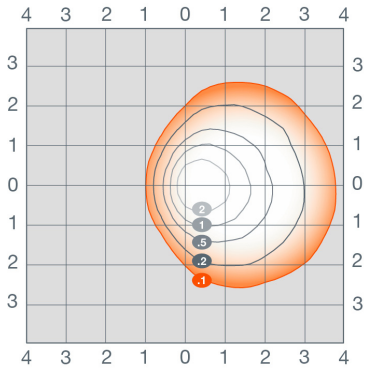


WALPAK4A 120W

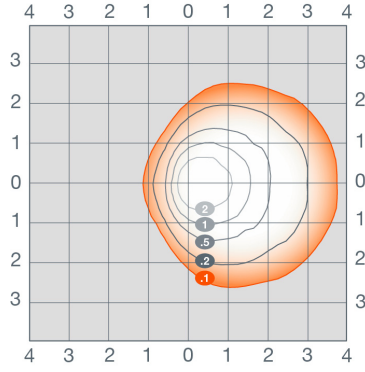


Physical Information

Luminaire Description	(A) Depth in (mm)	(B) Height in (mm)
WALPAK4A 30W	9.49 (241)	8.94 (227)
WALPAK4A 50-80W	7.46 (189.5)	9.29 (236)
WALPAK4A 120W	9.4 (238.7)	9.1 (231)


WALPAK4A 30W

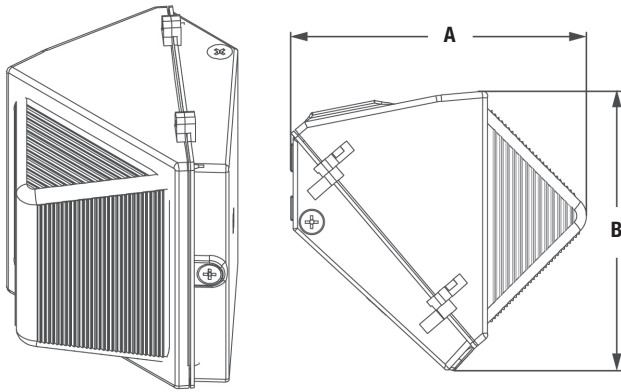

WALPAK4A 50-80W

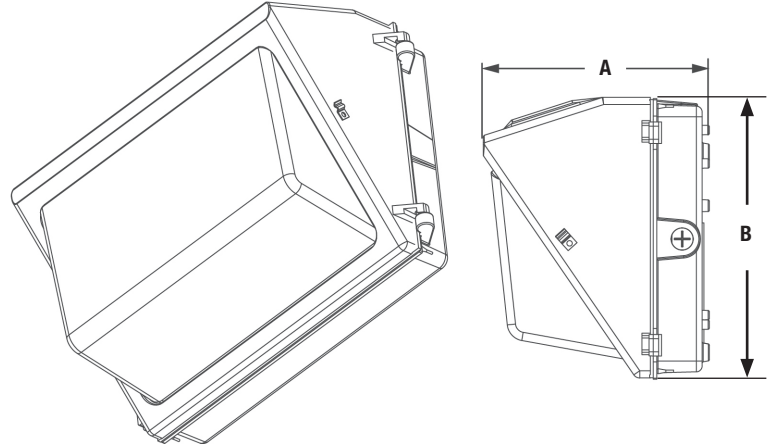

WALPAK4A 120W

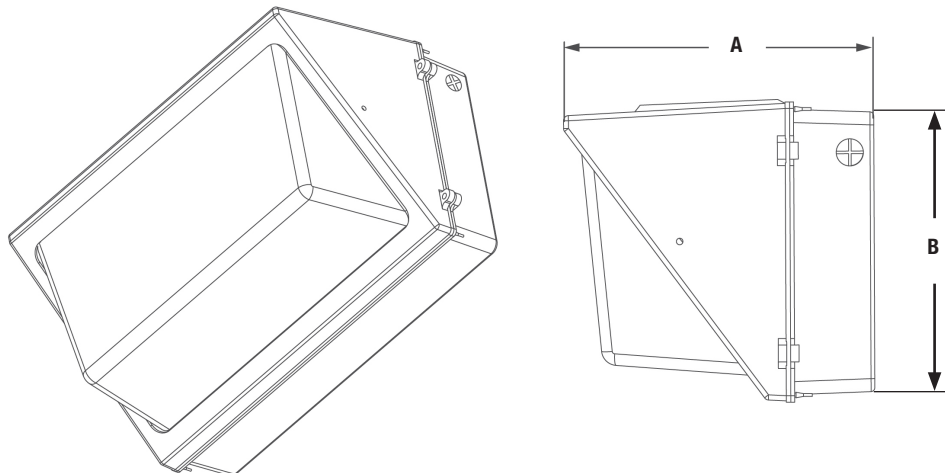

LEDVANCE LLC
 200 Ballardvale Street
 Wilmington, MA 01887 USA
 Phone 1-800-LIGHTBULB (1-800-544-4828)
 www.sylvania.com

SYLVANIA and LEDVANCE are registered trademarks.
 All other trademarks are those of their respective owners.
 Licensee of product trademark SYLVANIA in general lighting.
 Specifications subject to change without notice.

 /sylvania  /sylvania

Name: _____

Email: _____

Phone: _____

