


SYLVANIA Luminaires

Strip



Catalog #	Type
Project	
Notes	
Date	
Prepared by	

Dimensions

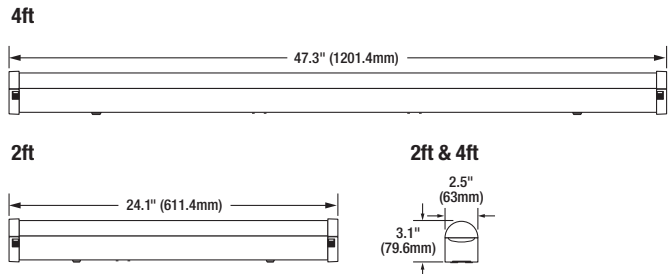

Product Features

- Snap fit for quick, and easy tool-less access
- End-to-end linkable for customized run lengths
- Offered in three wattages/lumen packages and two lengths
- Application: retail, manufacturing, warehouse, office, education and low bay applications

Specifications

Weight: 2ft: 2.1 lbs (1.0 kg) 4ft: 4.0 lbs (1.8 kg)

Construction: Sheet metal housing with powder coat paint finish and acrylic lens. The standard color is white.

LED System: LED system with a life rating of $\geq 50,000$ hours at L_{70} @25°C. Luminaire efficacy up to 127 LPW.

Electrical: Offered in 16, 32, and 47 Watts, the luminaire is designed to operate through the 120-277 VAC voltage. The LED driver has a 4kV surge suppression and is a constant current device, meeting UL1310 and UL48 Class 1 with built-in over temperature protection. The power factor is $\geq 90\%$ and THD is $\leq 20\%$.

Dimming: The driver is 0-10V dimmable (down to 10%). Please reference the compatibility document (LEDLUM012).

Color Characteristics: CRI>80; CCT of 3500K, 4000K or 5000K.

Optics: Diffuse polycarbonate lens.

Installation: Luminaire is surface or suspension mounted.

Operating Temperature: -13°F to +104°F (-25°C to +40°C).

Listings: cETLus listed to UL1598 standards and for damp locations.

Warranty: Standard 5-year luminaire warranty (LEDLUM001).

Note: Specifications subject to change without notice. IES files available online.



Ordering Guide

Item Number:

<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>		
STRIP	1A	/	XXX	UNV	D	8	XX	/	XX	S	/	WH
Product Name	Generation		Wattage	Voltage	Dimming	CRI	Color Temp (CCT)		Dimensions	Mounting		Color/Finish
STRIP	1A		016 = 16 Watts 032 = 32 Watts 047 = 47 Watts	UNV = 120-277V	D = 0-10V	8 \geq 80	35 = 3500K 40 = 4000K 50 = 5000K		24 = 24 in 48 = 48 in	S = Surface		WH = White

Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Input Voltage	Dimming	CRI	Color Temp (CCT)	Size	Total Fixture Lumens	LPW*	DLC**
70525	STRIP1A/016UNVD835/24S/WH	16	120-277V	0-10V	>80	3500K	2ft	2000	124	Std
70526	STRIP1A/016UNVD840/24S/WH	16	120-277V	0-10V	>80	4000K	2ft	1900	119	Std
70527	STRIP1A/016UNVD850/24S/WH	16	120-277V	0-10V	>80	5000K	2ft	2000	122	Std
74774	STRIP1A/032UNVD835/48S/WH	32	120-277V	0-10V	>80	3500K	4ft	3900	121	Std
74775	STRIP1A/032UNVD840/48S/WH	32	120-277V	0-10V	>80	4000K	4ft	4000	127	Std
74776	STRIP1A/032UNVD850/48S/WH	32	120-277V	0-10V	>80	5000K	4ft	4000	124	Std
70522	STRIP1A/047UNVD835/48S/WH	47	120-277V	0-10V	>80	3500K	4ft	5900	123	Std
70523	STRIP1A/047UNVD840/48S/WH	47	120-277V	0-10V	>80	4000K	4ft	6200	126	Std
70524	STRIP1A/047UNVD850/48S/WH	47	120-277V	0-10V	>80	5000K	4ft	6000	124	Std

*LPW per LM79 report
 **Std for DLC Standard.

LEDVANCE LLC
 200 Ballardvale Street
 Wilmington, MA 01887 USA
 Phone 1-800-LIGHTBULB (1-800-544-4828)
www.sylvania.com

SYLVANIA and LEDVANCE are registered trademarks.
 All other trademarks are those of their respective owners.
 Licensee of product trademark SYLVANIA in general lighting.
 Specifications subject to change without notice.

 /sylvania  /sylvania

