

## Specifications:

Operating Voltage .....	Dual 120/277V
Battery .....	9.6V Long life, maintenance-free, rechargeable NiCd battery
Battery Backup Function .....	Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination
Battery Recharge .....	Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours
Illumination .....	1.0 watt (8 LEDs x 0.125W) per head
Lamp Heads .....	Adjustable LED lamp heads provides optimal center-to-center spacing
Mounting .....	EZ-snap mounting canopy included for top or end mount. Universal knockout pattern on back plate for wall mount
Housing .....	Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white EZ snap-out Chevron directional indicators
Warranty .....	Five year warranty on all electronics and housing. Battery prorated for five years
Operating Temperature .....	UL Listed for damp locations (0°C – 40°C)
CEC .....	Certified to CEC under Title 20 Regulations
Color .....	Available with white housing and choice of red or green lettering
Options .....	Remote capacity of up to 3.0 watts Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.




### Listing

Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

### Warranty

Five year limited warranty against defects in manufacturing

## Dimensions:

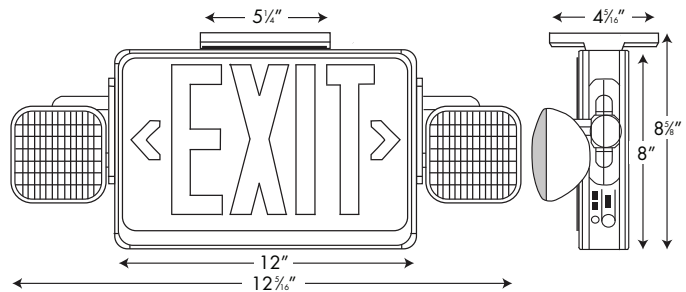

## Ordering Information

Item #	DESCRIPTION
LED20723	Universal Combo Emergency Exit Sign White Housing w/ Red Lettering
LED20784	Universal Combo Emergency Exit Sign White Housing w/ Red Lettering - Remote Capable
LED20785	Universal Combo Emergency Exit Sign White Housing w/ Green Lettering - Remote Capable

Specifications and dimensions subject to change without notice.