


Corrosion Resistant Industrial Workstation Fans



Features

- Pull chain switch
- Head tilts 360°
- FDA white coated steel guards
- SJTW type 3 conductor, 10' long cord
- Steel hub/spider aluminum paddle blades
- Corrosion resistant motor and switch
- Meets OSHA standards / 1 Year limited warranty
- Made in U.S.A. with domestic and foreign components

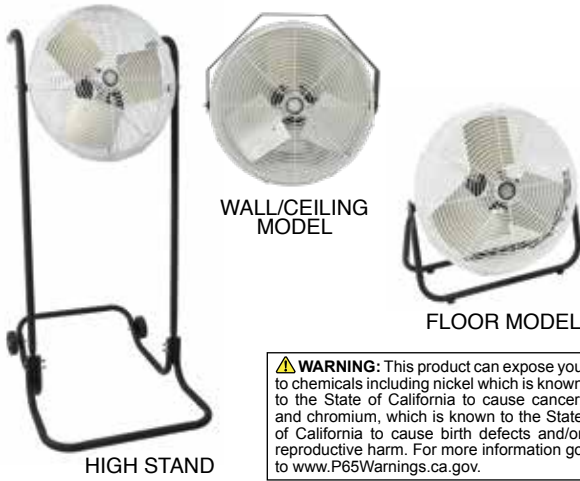

⚠ WARNING: This product can expose you to chemicals including nickel which is known to the State of California to cause cancer, and chromium, which is known to the State of California to cause birth defects and/or reproductive harm. For more information go to www.P65Warnings.ca.gov.

Motor Specifications

- Sleeve bearing
- Totally enclosed
- 1-Phase, 120V
- 3-Speed
- Permanently lubricated
- Frame size: 42
- 1/2" Shaft
- Sealed electrical enclosure

Standard Models

SIZE	MFG CATALOG NUMBER	MFG MODEL NUMBER	FAN TYPE	MOTOR HP	CFM* / RPM			VELOCITY PROFILE	DIMENSIONS			MAX AMPS	WT. (LBS)	LIST
					HIGH	MED	LOW	CFM / Area Sq Ft	"H"	"W"	"D"			
18"	08763202	F-18-CR	FLOOR MODEL	1/8	1800 / 1660	1500 / 1550	1300 / 1370	2900 / 125	20 1/2"	20 1/2"	10 1/2"	2.2	20	453
24"	08763502	F-24-CR		1/8	2100 / 1634	1900 / 1484	1600 / 1200	3500 / 150	26"	26"	10 1/2"	2.4	23	517
18"	08763302	F-18H-CR	HIGH STAND	1/8	1800 / 1660	1500 / 1550	1300 / 1370	2900 / 125	53"	25"	27"	2.2	27	601
24"	08763602	F-24H-CR		1/8	2100 / 1634	1900 / 1484	1600 / 1200	3500 / 150	53"	30"	27"	2.4	30	648
18"	08763102	U-18-CR	WALL/CEILING MODEL	1/8	1800 / 1660	1500 / 1550	1300 / 1370	2900 / 125	21 1/2"	20 1/2"	10 1/2"	2.2	20	453
24"	08763402	U-24-CR		1/8	2100 / 1634	1900 / 1484	1600 / 1200	3500 / 150	27"	26"	10 1/2"	2.4	23	517

*Measured 2 feet from face of fan

Industrial Mounted Workstation Fans



⚠ WARNING: This product can expose you to chemicals including nickel which is known to the State of California to cause cancer, and chromium, which is known to the State of California to cause birth defects and/or reproductive harm. For more information go to www.P65Warnings.ca.gov.

FAN SIZE	DIMENSIONS		
	"H"	"W"	"D"
12"	15 1/4"	14 1/2"	9 1/2"
18"	21 1/2"	20 1/2"	10 1/2"
24"	27"	26"	10 1/2"

Features

- Pull chain switch
- Head rotates 360° vertically and horizontally
- Coated steel guards
- SJT type 3 conductor, 10' long cord
- Steel hub/spider aluminum paddle blades
- Meets OSHA standards / 1 Year limited warranty
- Imported to TPI specifications



Motor Specifications

- Sleeve bearing
- Totally enclosed, permanently lubricated
- Frame size: 42
- 3-Speed
- 1-Phase, 120V
- 5/16" (12" fan only) and 1/2" shaft

Standard Models

FAN SIZE	MFG CATALOG NUMBER	MFG MODEL NUMBER	MOTOR HP	CFM* / RPM			VELOCITY PROFILE	MAX AMPS	WT. (LBS)	LIST	Pipe Mount Adaptor			
				HIGH	MED	LOW	CFM / Area Sq Ft				PIPE DIAMETER	MFG CATALOG NUMBER	MFG MODEL NUMBER	LIST
12"	07986002	U-12-TE	1/12	900 / 1590	800 / 1380	700 / 1080	1400 / 50	1.1	13	181	1"	08512402	PM-1	61
18"	07972802	U-18-TE	1/8	1800 / 1660	1500 / 1550	1300 / 1370	2900 / 125	2.2	20	223	1 1/2"	08512502	PM-1.5	67
24"	08540702	U-24-TE	1/8	2100 / 1634	1900 / 1484	1600 / 1200	3500 / 150	2.4	23	250	2"	08512602	PM-2	74
24"	08775502	U-24-TE-HV	1/4	3800 / 1100	3600 / 950	3400 / 800	6000 / 240	2.7	25	267	2 1/2"	08512702	PM-2.5	80
											3"	08512802	PM-3	87

*Measured 2 feet from face of fan

Note: Mount with one bolt or lag screw to walls, ceilings, work benches, machines or any surface.

NEW PRODUCT for 2020



FAN SIZE	MFG CATALOG NUMBER	MFG MODEL NUMBER	MOTOR HP	CFM	MAX AMPS	WT. (LBS)	CORD LENGTH	LIST
18"	08194502	U-18-TE-HD	1/10	1900	1.1	20	10'	257

Can be used in outdoor semi-protected applications.