



PL Lamp G24

EnVision LED has manufactured a G24 PL lamps replacement in LED that can work with 2-Pin Diagonal or 4-Pin sockets. With a full 360° spectrum, replace existing fluorescent G24 lamps by plugging it into or bypassing the existing ballast. Use the lamp in the vertical or horizontal applications. Unlike fluorescent, the EnVision PL Lamp does not need time to warm up, it turns on instantly.

Applications:

- Recessed downlight
- Security lighting
- Sconces
- Residential and commercial lighting

Product Information:

- Available in two wattages to replace existing 13, 18 or 20W
- Install using existing ballast
- Compatible with existing fluorescent fixtures with no rewiring needed or choose to bypass the ballast completely.

LED - PL - G24 - Watts - Color - Warranty

1
2
3
4

1 Product

LED-PL-G24 PL Lamp G24 (AC direct or ballast compatible) 360° Horizontal or Vertical 13W Equivalent

2 Watts

7W 7w / 650lm
10W 10w / 1,000lm
11W 11w / 1,300lm
13W 13w / 1,300lm

3 Color


30K 3000K
40K 4000K
50K 5000K

4 Warranty

(Blank) 5 Years (incl.)
10YR 10 Years

Specs and model numbers are subject to change with or without notice.

DIMENSIONS

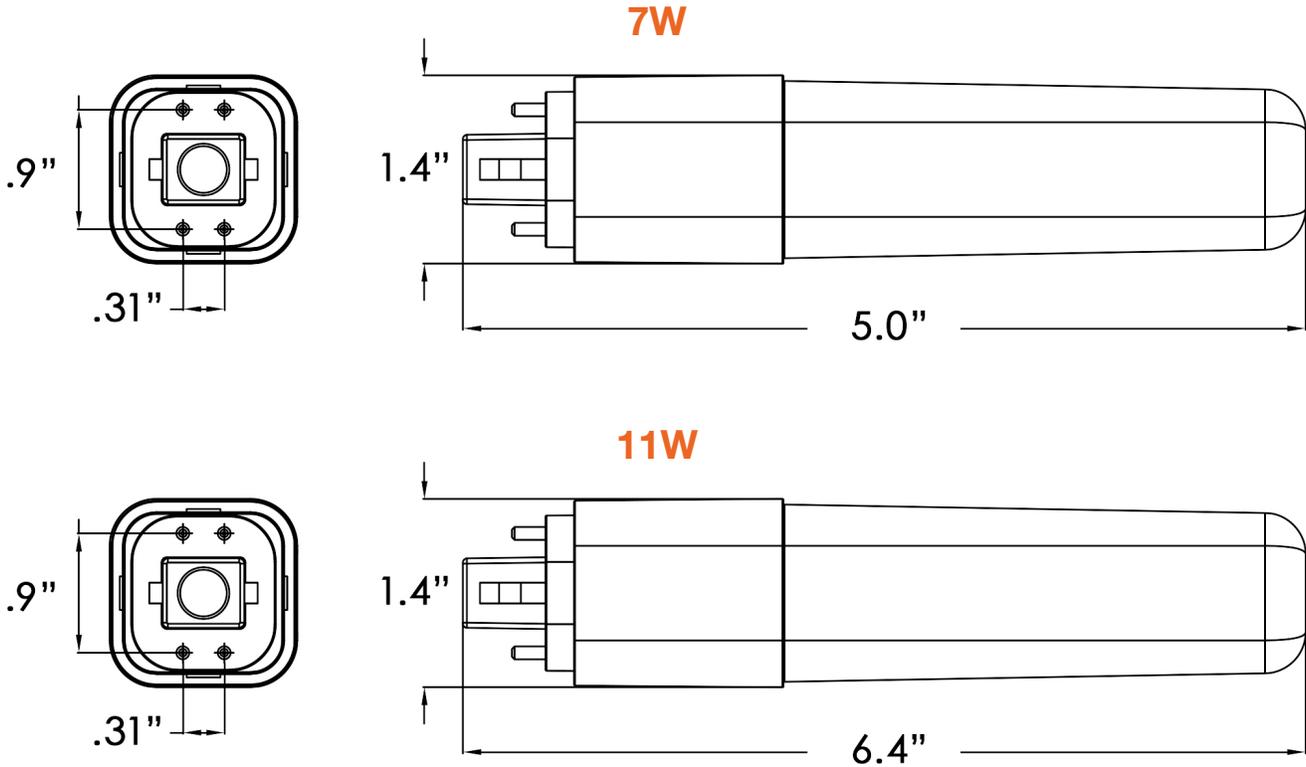

Compatible Ballast List

(Tested but not limited to)

Base Compatibility	TRIAD	PHLLIPS	PONY
G24Q-1	C242UNVME	ICF-2S13-HI-LD	SC-120-113-CFL
G24Q-2	C2642UNVME	ICF-2S18-HI-LD	KEYSTONE
G24Q-3	C218UNVME	ICF-2S26-HI-LD	KTEB-226-1-TP
GX24Q-2		ICF-2S42-HI-LD	LUMAPRO
GX24Q-3		REZ-2Q26-M2-LD	4KGJ7
	SYLVANIA	FULHAM	ROBERTSON
	QTP1/2x18CF/UNV	NPY-120-226-CFL	RED1L10-120
	QTP/2x16CF/UNV		
	WATRAN		
	DBC218MVRSN		
	DBIS26R120N		

Specs and model numbers are subject to change with or without notice.