

Project:	Part #:
Туре:	



4 - 6" Round



4 - 6 - 8" Square



8" Round

EXT SnapTrim Downlight

5 CCT Selectable: 27/30/35/40/50K

EnVision LED has developed a line of super slim LED downlights that eliminate the need for a can. The external remote junction box mounts inside the ceiling and the fixture is IC Rated. EnVisions EXT SnapTrim downlights feature three interchangable trims, including black, bronze, and brushed nickel. By reducing material cost and installation time, the EnVision SnapTrim is the ideal retrofit or new construction recessed lighting solution yet. Simply cut a hole in the ceiling, power the J-Box to the wall switch, and "snap" the trim flush.

Applications:

- Retrofitting
- New Construction
- · Residential Lighting
- · Commercial Lighting

Product Information:

- External j-box & spring mount clips for easy installation
- 5CCT version toggles between 2700k, 3000k, 3500k, 4000k & 5000k
- · Compatible with most dimmers (e.g. Lutron DVCL-153P)
- · Spring mount clips make installation easy
- · Canless module does not require housing
- IP65 Wet Location Rated

5 C C T - Trims* Control EMB Warranty Size/Shape/Watts L E D - S L - P N L6 2 7 1 Product 2 Size/Shape/Watts 3 Color 5 Control 6 EMB 7 Warrantv

LED-SL-PNL Non-Adjustable

4" Round, 8/10/12W 4R-3P12W (500/700/840lm) 4SQ-3P12W 4" Square, 8/10/12W

(500/700/840lm) 6R-3P15W 6" Round, 9/12/15W (750/950/1150lm)

6SQ-3P15W 6" Square, 9/12/15W (750/950/1150lm) 8R-3P22W 8" Round, 16/19/22W

(1200/1400/1600lm) 8SQ-3P22W

8" Square, 16/19/22W (1200/1400/1600lm)

5CCT Variable 27K/30K/35K/40K/50K 4 Trims*

WHT White (incl.) Black BLK R7 Bronze Brushed Nickel

(Blank) None Controller

(Blank) None **EMB** Emergency Backup

(Blank) 5 Year (incl.) **10YR** 10 Year

Specs and model numbers are subject to change with or without notice













FEATURES

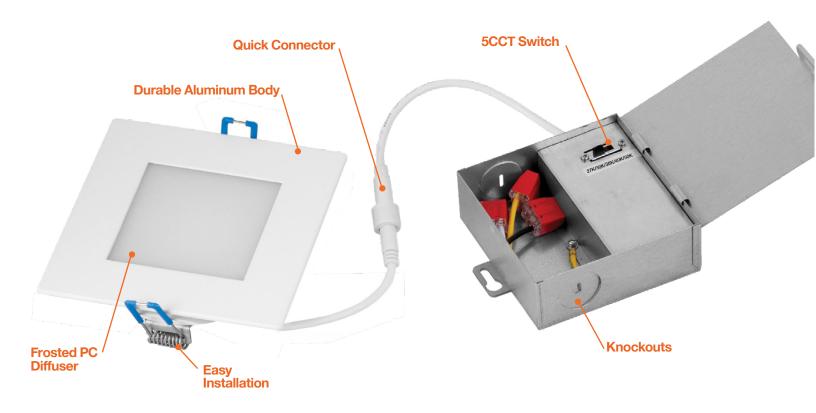

INSTALLATION

The slim panel LED redefines recessed downlight installations. The narrow design and remote driver box with the panel LED can be installed in conifned, hard to reach spaces such as closets, bathrooms, hallways, stairwells, outside soffits and other areas that would have been nearly impossible with traditional recessed housings.

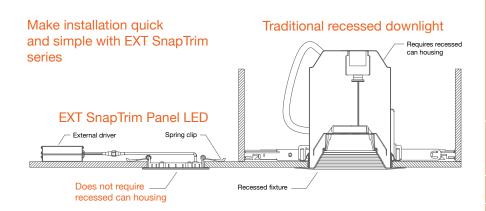


DIMMER COMP A TIBILITY						
Brand				Dimmability		
	Ariadni	AYCL-153P	150W	OK		
	Diva	DV-600PR	600W	OK		
	Diva	DVCL-153P	150W	OK		
	Maestro	MACL-153MH	600W	OK		
	Maestro Wireless	MRF2-6CL	150W	OK		
Lutron	Rotary	D-600P	600W	OK		
LUITOII	Electronic(ELV)	NTELV-300P	600W	OK		
	Skylark	S-600P	600W	OK		
	Skylark Contour	CT-600P	600W	OK		
	Skylark Contour	CTCL-153P	150W	OK		
	Toggler	TG-600P	600W	OK		
	Toggler	TGCL-153P	150W	OK		
	Sureslide	6633	600W	ОК		
Laudena	Sureslide Decora	6674	600W	OK		
Leviton	Trimatron	6672	600W	OK		
	Sureslide	6613	600W	OK		
Legrand	Adorne	DLV703	700W	OK		
	Harmony	H703PTW	700W	OK		
Cooper	Aspire	9530	1000W	OK		
	Devine	DAL03P	300W	ОК		



EXT SnapTrim Downlight


DIMENSIONS

4" Round




Cut Out: Ø4 1/4" (108mm)

6" Round




Cut Out: Ø6 1/4" (158mm)

8" Round




4" Square





Cut Out: Ø4 1/4" (108mm)

6" Square



Cut Out: Ø6 1/4" (158mm)






HOLE CUT SIZE

 $\begin{array}{lll} \text{4 inch round, 4 inch square} & \varnothing \text{4-1/4" (108mm)} \\ \text{6 inch round, 6 inch square} & \varnothing \text{6-1/4" (158mm)} \\ \text{8 inch round, 8 inch square} & \varnothing \text{8-1/4" (210mm)} \end{array}$



EXT SnapTrim Downlight

CLIP-ON TRIMS




FIXTURE, TRIM, & ACCESSORY REFERENCE

Fixture Model	Voltage	Watts	Lumens	Color	CRI
LED-SL-PNL-4R-3P12W-5CCT	120V	8/10/12w	500/700/840	5CCT	>90
LED-SL-PNL-4SQ-3P12W-5CCT	120V	8/10/12w	500/700/840	5CCT	>90
LED-SL-PNL-6R-3P15W-5CCT	120V	9/12/15w	750/950/1150	5CCT	>90
LED-SL-PNL-6SQ-3P15W-5CCT	120V	9/12/15w	750/950/1150	5CCT	>90
LED-SL-PNL-8R-3P22W-5CCT	120V	16/19/22w	1200/1400/1600	5CCT	>90
LED-SL-PNL-8SQ-3P22W-5CCT	120V	16/19/22w	1200/1400/1600	5CCT	>90

-							
Λ	C	_	<u>_</u>	S	()	u	I - S




JBX-EXT Extension Cable (61/101)



CUNV-NC-ICAT Universal Pre-Monting Plate 5 3/10" x 14 1/2"



C4-JBX-RI4" Rough In Plate
6 1/2" x 13 1/4"



C6-JBX-RI 6" Rough In Plate 8 1/2" x 17 1/4"



C8-JBX-RI 8" Rough In Plate 10 1/2" x 26"



Trim Model	Description
SL-PNL-4R-TRIM-BLK	4" Round Black Finish Trim
SL-PNL-4R-TRIM-BZ	4" Round Bronze Finish Trim
SL-PNL-4R-TRIM-BN	4" Round Brushed Nickel Trim
SL-PNL-4SQ-TRIM-BLK	4" Square Black Finish Trim
SL-PNL-4SQ-TRIM-BZ	4" Square Bronze Finish Trim
SL-PNL-4SQ-TRIM-BN	4" Square Brushed Nickel Trim
SL-PNL-6R-TRIM-BLK	6" Round Black Finish Trim
SL-PNL-6R-TRIM-BZ	6" Round Bronze Finish Trim
SL-PNL-6R-TRIM-BN	6" Round Brushed Nickel Trim
SL-PNL-6SQ-TRIM-BLK	6" Square Black Finish Trim
SL-PNL-6SQ-TRIM-BZ	6" Square Bronze Finish Trim
SL-PNL-6SQ-TRIM-BN	6" Square Brushed Nickel Trim
SL-PNL-8R-TRIM-BLK	8" Round Black Finish Trim
SL-PNL-8R-TRIM-BZ	8" Round Bronze Finish Trim
SL-PNL-8R-TRIM-BN	8" Round Brushed Nickel Trim

Accessory Model	Description
JBX-EXT-6'	6' J-Box Connetor Extension Cable
JBX-EXT-10'	10' J-Box Connector Extension Cable
JBX-11W-277-347V	200-347V Driver for 11W Fixture (4")
JBX-14W-277-347V	200-347V Driver for 14W Fixture (6")
JBX-18W-277-347V	200-347V Driver for 18W Fixture (8")
C4-JBX-RI	4" Rough-In Plate (6 ½" x 13 ¼")
C6-JBX-RI	6" Rough-In Plate (8 ½" x 17 ¼")
C8-JBX-RI	8" Rough-In Plate (10 ½" x 26")
CUNV-NC-ICAT	2/3/4/6" Pre-Mounting Plate