

Project Name:

Part Number:

Type:



# EXIT & EMERGENCY SERIES


## EXS EXIT SIGNS



407-478-3759  
www.ilp-inc.com

### FEATURES

- Dual-voltage input 120V/277V
- Optional (-SD) Self Diagnostic versions available
- Standard models are AC-only and do not include a battery
- (-B) Battery models feature a maintenance-free NiCad battery
- (-RC) Remote-Capable models feature a maintenance-free NiMH battery
- Energy-saving LED back-lit system
- Optional (-RC) Remote-Capable version supports up to two single or one double High-Output lighting heads
- Injection-molded, high-impact, UV-stabilized, UL94 V-0 thermoplastic construction in white finish.
- Snap-fit faceplate design for installation without tools
- Removable universal chevrons for directional indications
- Top, back, J-box or end mounting through universal mounting plate and canopy. All components included with the sign.
- Universal single face and double face (extra faceplate included)
- Temp rating: 60°-86°F (20°-30°C) damp-rated
- DOE and CEC Registered
- UL 924 Listed for damp location
- 5 year warranty on all electronics and housing
- Separate 5 year pro-rated warranty on the battery

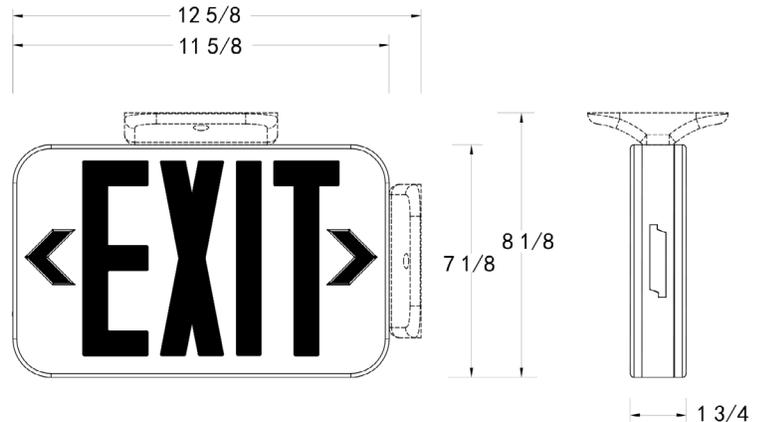

### ORDERING GUIDE:

MODEL	DESCRIPTION
EXS1-U-2RW	Exit sign, 120V/277V, White Housing, Red Letters, Two Sided
EXS1-U-2RW-B	Exit sign, 120V/277V, White Housing, Red Letters, Two Sided with Battery Backup
EXS1-U-2RW-B-SD	Exit sign, 120/277V, white hsg, red letters, two sided with Self-Diagnostic Battery Backup
EXS1-U-2RW-B-RC	Exit sign, 120V/277V, White Housing, Red Letters, Two Sided with Battery Backup and HO Remote-Capable
EXS1-U-2RW-B-RC-SD	Exit sign, 120/277V, white hsg, red letters, two sided with Self-Diagnostic Battery Backup and HO Remote-Capable
EXS1-U-2GW	Exit sign, 120V/277V, White Housing, Green Letters, Two Sided
EXS1-U-2GW-B	Exit sign, 120V/277V, White Housing, Green Letters, Two Sided with Battery Backup
EXS1-U-2GW-B-SD	Exit sign, 120/277V, white hsg, green letters, two sided with Self-Diagnostic Battery Backup
EXS1-U-2GW-B-RC	Exit sign, 120V/277V, White Housing, Green Letters, Two Sided with Battery Backup and HO Remote-Capable
EXS1-U-2GW-B-RC-SD	Exit sign, 120/277V, white hsg, green letters, two sided with Self-Diagnostic Battery Backup and HO Remote-Capable

### ACCESSORIES (Ordered Separately)

EXR1-WSS	Emergency Light Remote Head, White Housing, Single Head, Standard Output
EXR1-WSD	Emergency Light Remote Head, White Housing, Double Head, Standard Output
EXR1-WHS	Emergency Light Remote Head, White Housing, Single Head, High Output
EXR1-WHD	Emergency Light Remote Head, White Housing, Double Head, High Output
EXR1-WHS-WL	Emergency Light Remote Head, White Housing, Single Head, High Output, Weatherproof
EXR1-WHD-WL	Emergency Light Remote Head, White Housing, Double Head, High Output, Weatherproof



\*See EXR Remote Head cut sheet for product details