

PROJECT NAME: \_\_\_\_\_  
 NOTES: \_\_\_\_\_

 CAT. #: \_\_\_\_\_  
 FIXTURE SCHEDULE: \_\_\_\_\_

## Emergency Battery Backup

EBU Series



### Product Description:

The EBUUP15007N0100 unit is listed for factory and field installation and designed to work with various MaxLite fixtures. It is suitable for use in residential, commercial or industrial applications.

### Features:


- Input wattage: 7W
- Input Voltage: 100-347AC, 50/60Hz
- AC Input Current: 100mA max
- AC Input Power Rating: 7.0W max
- Emergency Time: 90 Minutes
- Output Voltage: 50-150VDC
- Battery Charging Current: 250mA
- Recharge Time: 24 Hours
- Operating Temperature: 32°F to 122°F
- Includes a test switch and the charge indicator kit, no cover

### Listings:

- UL924, Listed for factory or field installation
- CEC Compliant

### Warranty:

5-year standard warranty\*  
 (further details available at [www.maxlite.com/warranties](http://www.maxlite.com/warranties))  
 \*Product may be eligible for a warranty extension to 10 years, for an additional fee. Contact MaxLite for details.

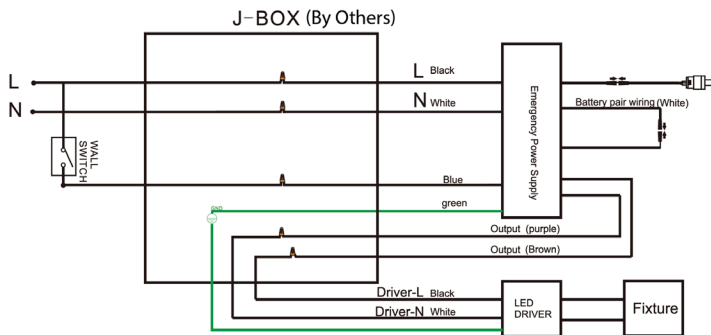


### Specification

**ORDER CODE: 100298 / PART NUMBER: EBUUP15007N0100**

<b>OUTPUT POWER</b>	<b>15W</b>
Battery Li-ion Battery	14.8V/2000mAh

### Dimensions

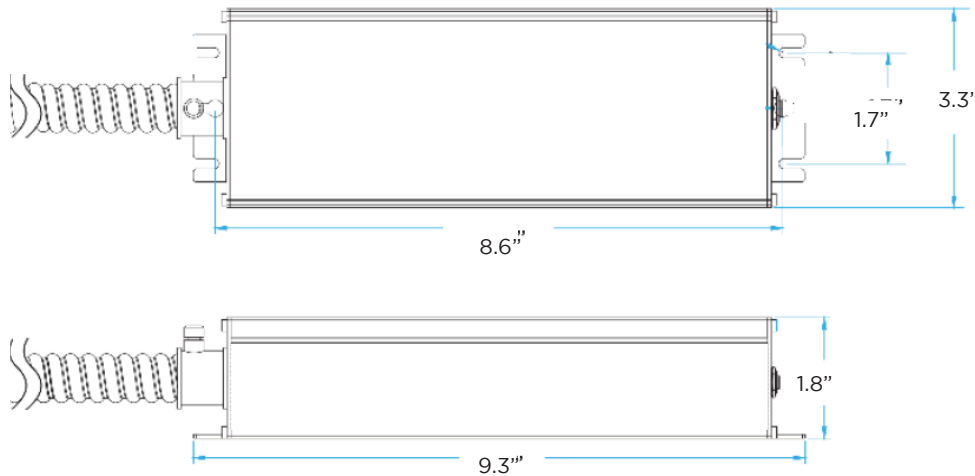

**5-year standard warranty** (further details available at [www.maxlite.com/warranties](http://www.maxlite.com/warranties)) Product may be eligible for a warranty extension to 10 years, for an additional fee. Contact MaxLite for details.