



## Commercial Downlight Wattage + CCT Selectable

### 3 CCT: 30/40/50K

Introducing EnVision LED's new Commercial Downlight with selectable wattage and color! Using EnVisions Select-N-Switch technology, easily select between a number of different wattages, and choose between 3000K, 4000K, and 5000K. Select 9 different color and lumen packages ALL-IN-ONE.

#### Mounting and Installation:

- Retrofit: cut-out ceiling size:  
 4": 4.9"  
 6": 6-1/8" - 7- 3/16"  
 8": 7-1/2" - 8-7/8"  
 10": 9" to 10"
- This fixture does not fit into a recessed can. No housing required for remodel applications. Use a new construction plate for new construction. See Accessories on page 3.

#### Certifications:

- ETL Listed for USA and CA
- Energy Star Certified
- IC Rated and ASTM-E283 Air-Tight
- Meets CA Title 24 JA8 Requirement
- FCC CFR 47, FCC Part 15, Subpart B:2017
- 5 Year EnVision LED Limited Warranty

#### Whats Included:

- LED Fixture
- Junction Box Mounting Plate
- Mounting Screws
- Installation Guide

#### Detail Specification:

- Wet Location Location Rated
- CRI 90 LED Chip, R9>50
- 120-277V Driver, 50/60Hz
- 6" & 8": 80° Beam, 10": 90° Beam
- Operating Temperature: 0°F ~ +113°F
- PF >0.9, THD < 20%
- 0-10V Dimmable Down to 5%

#### Applications:

- Residential and Commercial Lighting
- New Construction or Remodel Use
- Recessed Lighting

#### Product Information:

- Select-N-Switch Technology
- Metal trim and module for better heat dissipation and longevity
- Various trim colors available
- PC lens reduces glare and optimizes even beam distribution
- Optional Emergency Backup Available: delivers full lumens in EM mode up to 25W
- L70 @ 50,000 Hours lumen maintenance

**LED - CMD - Size/Watts - TRI - Voltage - Emergency**

1
2
3
4
5

#### 1 Product

**LED-CMD**  
 Commercial Downlight

#### 2 Size/Watts

**4-3M19** 4 Inch (9/14/19W-750/1000/1500lm)  
**6-3M19** 6 Inch (9/13/19W-800/1200/1600lm)  
**8-3M29** 8 Inch (16.5/23/29W-1500/2000/2500lm)  
**10-3M38** 10 Inch (21/30/38W-1250/2000/3000lm)

#### 3 Color

**TRI** Selectable  
 30K / 40K / 50K


#### 4 Voltage

**UNV** 120-277V  
**HV** 347-480V

#### 5 Emergency

**(Blank)** None  
**EMB** 25W HV External

*Specs and model numbers are subject to change with or without notice*

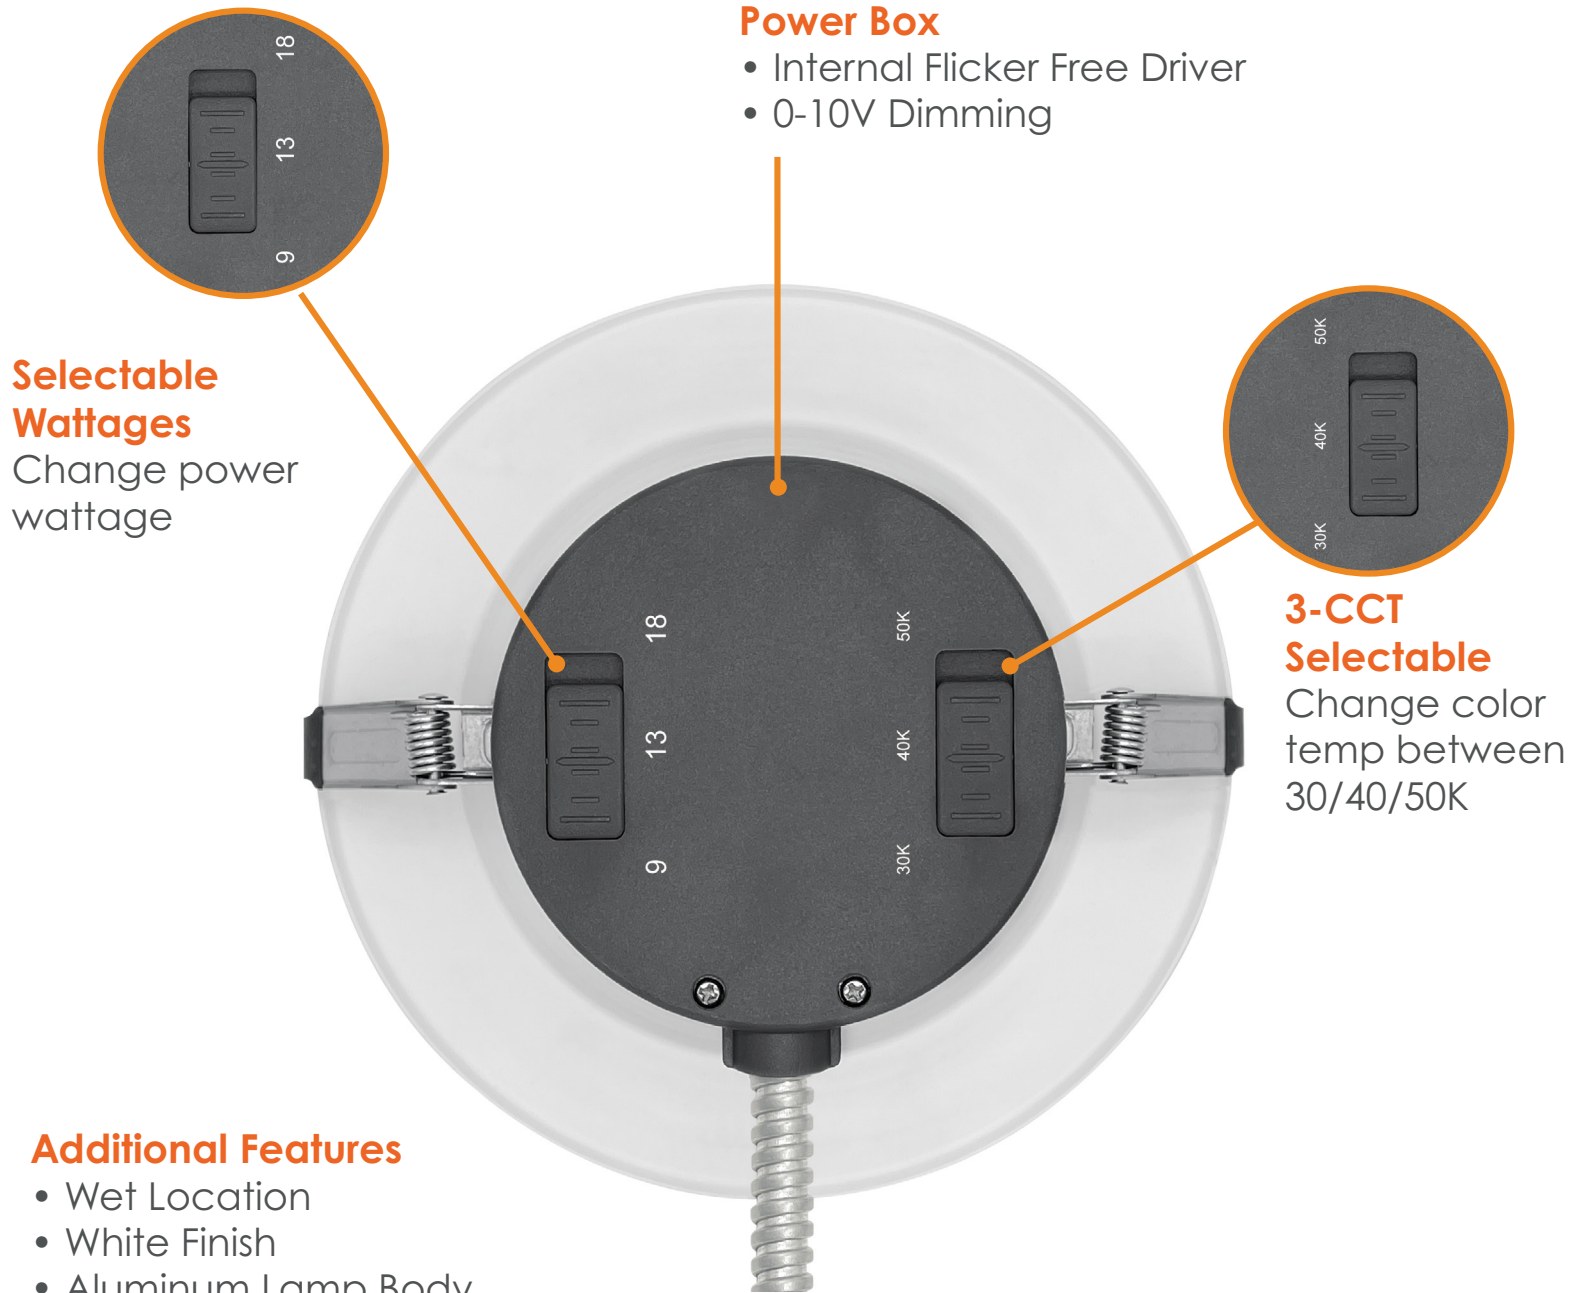

**Selectable Wattages**

Change power wattage

**Power Box**


- Internal Flicker Free Driver
- 0-10V Dimming

**3-CCT Selectable**

Change color temp between 30/40/50K

**Additional Features**

- Wet Location
- White Finish
- Aluminum Lamp Body
- Deep Reflector Design
- Low Glare




**Carabiner Safety Clip**



**480V Step Down Transformer**  
**4S Junction Box**  
 Optional Accessory Available

## ACCESSORIES

### TRIMS



**CMD-TRIM-4-BLK-SM**

4 Black Reflector

**CMD-TRIM-6-BLK-SM**

6" Black Reflector

**CMD-TRIM-8-BLK-SM**

8" Black Reflector

**CMD-TRIM-10-BLK-SM**

10" Black Reflector

**GCMD-TRIM-4-HZ-SM**

4" Clear-Spectacle Haze Reflector

**GCMD-TRIM-6-HZ-SM**

6" Clear-Spectacle Haze Reflector

**CMD-TRIM-8-HZ-SM**

8" Clear-Spectacle Haze Reflector

**CMD-TRIM-10-HZ-SM**

10" Clear-Spectacle Haze Reflector

### GOOF RINGS



**GR-4-WH**

4" Goof Ring, Inner Dim: 4" Outer Dim: 8"

**GR-6-WH**

6" Goof Ring, Inner Dim: 6.3" Outer Dim: 10.5"



**GR-8-WH**

8" Goof Ring, Inner Dim: 8" Outer Dim: 12.5"

**GR-10-WH**

10" Goof Ring, Inner Dim: 9" Outer Dim: 14.1"

### BOX & PLATES



**JBOX-ALM**

Junction Box (6 Knock-Outs)

**C4-NC-RI-J-JBX**

4" Commercial New Construction Plate with Joist Bar + J-Box

**C6-NC-RI-J-JBX**

6" Commercial New Construction Plate with Joist Bar + J-Box

**C8/10-NC-RI-J-JBX**

8/10" Commercial New Construction Plate with Joist Bar + J-Box

### EMERGENCY BACK-UP





**LED-EMB-25W-HV-0/10V**

Emergency Back Up For Internal Drivers  
(Works with all 0-10V Dim or <25W fixtures  
-Single Sided Flex-



## DIMENSIONS

### 4 Inch

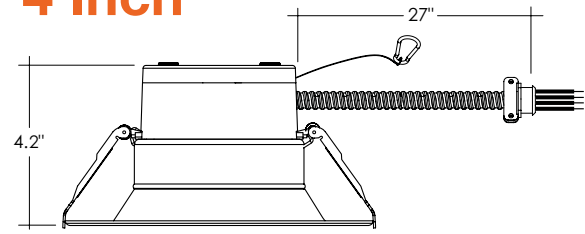



*Cut Out Size: 4.9"*

### 6 Inch

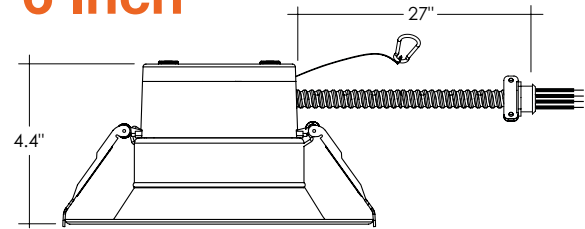



*Cut Out Size: 6-1/8" - 7- 3/16"*

### 8 Inch

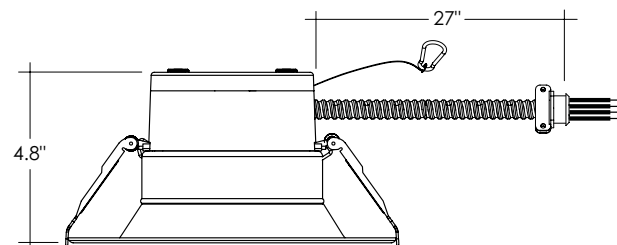

*Cut Out Size: 7-1/2" - 8-7/8"*

### 10 Inch

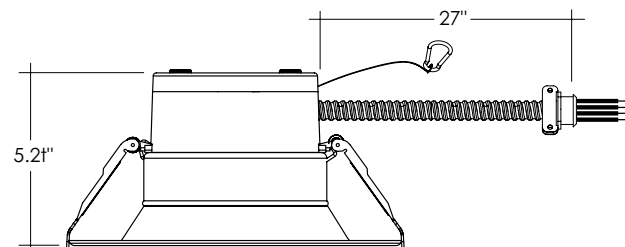

*Cut Out Size: 9" to 10"*