EnVisionLED™

Edge-lit LED Panel

2X4

2X2

1X4

2x2 **2x4**

**Surface Mount Frame - 3.5" Height
(Flange Drywall Kit also Available)**
See Page 3

The EnVision LED Panel series are edge-lit and designed to lay in 2x2, 2x4, or 1x4 fixtures. Retrofit existing fluorescent troffers used in drop ceilings, enjoy minimal power consumption, long lifespan, and bright illumination.

Applications:

- Suspended Installation
- T-Bar and Lay-in
- Recessed Lighting
- Surface Mount

Product Information:

- 0-10V Dimmable; Fully Dimmable; Compatible with Daylight Harvesting System
- Ultra slim design emmiting shadowless light, uniformity, and no spots
- Flicker-free, instant-start, no UV radiation, no RF interference
- Power Efficiency: >0.87 / Power Factor: 0.9
- Chip: SMD 4014 LM80 Certification
- Rated up to 50,000 hours life
- 5 Year Limited Warranty
- Shatter Resistant Lens

L E D - P N L - Size/Shape/Watts _ Color _ Accessories _ BMS - EMB - Warranty

1		2		3		4		5		6		7	

1 Product		**2** Size/Shape/Watts		**3** Color		**4** Accessories		**5** BMS		**6** EMB		**7** Warranty	
LED-PNL	Edge-lit Panel	**1X4-40W**	40W (4,600lm)	**30K**	3000K	**(Blank)**	None	**(Blank)**	None	**(Blank)**	None	**(Blank)**	5 Year (incl.)
		2X2-40W	40W (4,600lm), (5,200lm for -HL)	**35K**	3500K	**SM**	Surface Mount 2"Height (Standard)	**BMS**	Bi-Level Motion Sensor	**EMB**	Emergency Backup (External 15W)	**10YR**	10 Year
		2X4-50W	50W (5,750lm)	**40K**	4000K	**SM***	Surface Mount Frame Kit (3.5" Height)						
		2X4-60W	60W (6,900lm)	**50K**	5000K	**FLNG**	Flange (Drywall) Kit						
		2X4-72W	72W (8,280lm)	*30/35K Only available for 40/50W Fixtures*		**SK**	Suspension Kit						

Specs and model numbers are subject to change with or without notice
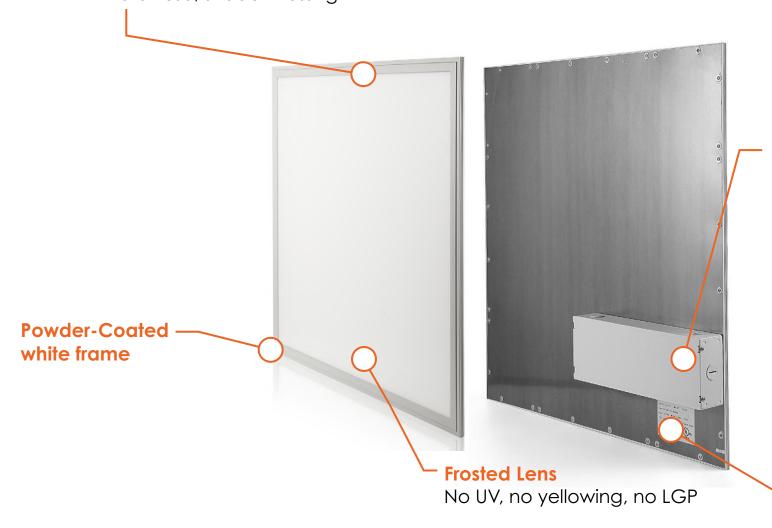
0-10V Dimmable   DLC   cULus LISTED

FEATURES

Unique Edge-Lit Design
The unique edge-lit design provides a diffuse, shadow-less light

Integrated Driver
Flicker-free integrated driver, 0-10V dimmable

Powder-Coated white frame

Frosted Lens
No UV, no yellowing, no LGP

Emergency Backup
Optional 90 minute emergency backup

EnVisionLED™

Optional Accessories

Surface Mount Frame

2x2

2x4

1x4

Flange (Drywall) Kit

2x2

2x4

1x4

Ceiling Cut Out Dimensions:
1X4: 12.5'' X 48.5''
2X2: 24.5'' X 24.5''
2X4: 24.75'' X 49''

Emergency Backup

Suspension Kit

Panel Accessories

Model	Description
LED-PNL-1X4-SM	Surface Mount Frame 1x4 (2'' Height)
LED-PNL-2X2-SM	Surface Mount Frame 2x2 (2'' Height)
LED-PNL-2X4-SM	Surface Mount Frame 2x4 (2'' Height)
2X2-SM-3.5''	Surface Mount Frame 2x2 (3.5'' Height)
2X4-SM-3.5''	Surface Mount Frame 2x4 (3.5'' Height)
LED-PNL-1X4-FLNG	Flange (Drywall) Kit for Panels 1x4
LED-PNL-2X2-FLNG	Flange (Drywall) Kit for Panels 2x2
LED-PNL-2X4-FLNG	Flange (Drywall) Kit for Panels 2x4
LED-PNL-1X4-SK	Suspension Kit for Panels 1x4
LED-PNL-2X2-SK	Suspension Kit for Panels 2x2
LED-PNL-2X4-SK	Suspension Kit for Panels 2x4
LED-EMB-15W-LV-SS	External 15W Emergency Backup
HD407V-CR	Bi-Level Motion Sensor