



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Hayes LED Overbed HAYB Series

Features

White linen patterned acrylic front panel provides a soft glow accent to this contemporary wall mount senior care overbed light. The finished trim accents identify the graceful shape. The Hayes provides both ambient and task light with a four way pull switch, standard (120 volt only). Top diffuser and bottom diffuser are frosted white acrylic.



Construction

The light wiring channel is formed from 22-gauge steel. An internal divider provides separate lamp compartments for controlled up light and down light. The decorative bands are stamped steel and glued to the diffuser. Fixture can mount horizontally only. Power connections can be made in the fixture wiring channel or in a standard junction box (not included).

Finish

All metal parts are finished in plated Satin Nickel or Oil-Rubbed Bronze. Internal housing is finished in a lighting grade baked white enamel.

Diffuser

Diffuser is 0.070" thick matte white acrylic for the down light and up light, and a white linen pattern acrylic front. Frame mounts to electrical channel with two decorative screws.

Electrical

Input 120VAC / 60 Hz
Not compatible with dimmers. Integrated four position pull switch (on up, on down, on both, all off) and single pull switch for nightlight.

LED

Integrated LED modules capable of producing:
60W = 4050 source lumens
80W = 5400 source lumens
Rated for 50,000 hours, 3000K (CCT), 90 CRI.
Provides 50 footcandles of reading light over bed.

Certification

All fixtures are cETLus listed for indoor damp locations.
ADA
*ENERGY STAR® qualified

Options (Consult Factory)

120-277V universal voltage available without switch and nightlight.


Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Specifications and dimensions
subject to change without notice.

Ordering Information:

Satin Nickel	Oil-Rubbed Bronze	LED	Source Lumens	CCT	L	H	D
HAYB3740L30ENS	HAYB3740L30ENRB	60W	1350 up/2700 down	3000K	36-3/4"	4-1/2"	4"
HAYB4954L30ENS*	HAYB4954L30ENRB*	80W	1800 up/3600 down	3000K	48-3/4"	4-1/2"	4"

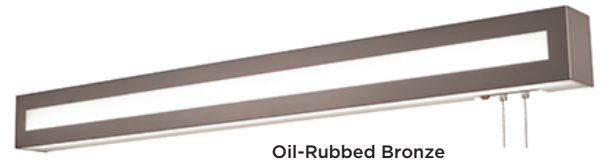

Oil-Rubbed Bronze



Satin Nickel

