

**LED**  
TECHNOLOGY


50,000 Hours Life, 50Watt, 120/277VAC

### Applications:

Ceiling, T-Bar Drop Ceiling, Troffer Replacement


### Features:

- Instant On LED
- Replaces 3&4 Lamp Fluorescent Troffer
- 10% 0-10V Dimming
- Long Life 50,000 Hours
- White Framed Edge
- Low Profile Design.
- Non-Corrosive Powder Coated Steel Body.
- Includes Earth Quake Clips
- Can be Installed with Backup Batteries.  
(Sold Separately)

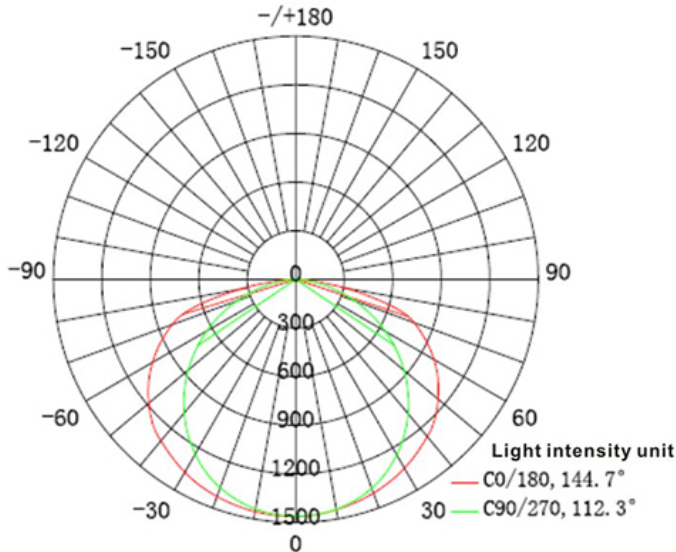

Average beam angel(50%) 128.5 degree


Recessed

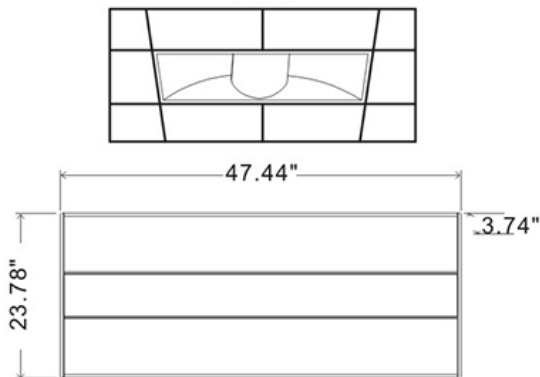

Weight: 13.3lb

### Specification:

Input Line Voltage:	120/277VAC
Input Power:	50W
Input Line Frequency:	60Hz
Lamp Life (Rated):	50,000hrs
Minimum Starting Temp:	-20°C
Maximum Operating Temp:	40°C
CCT:	4000K
CRI:	≥80
Lumens:	5000
CBCP:	1450
Power Factor:	<0.90
THD:	10%
Dimmable:	10% 0~10V

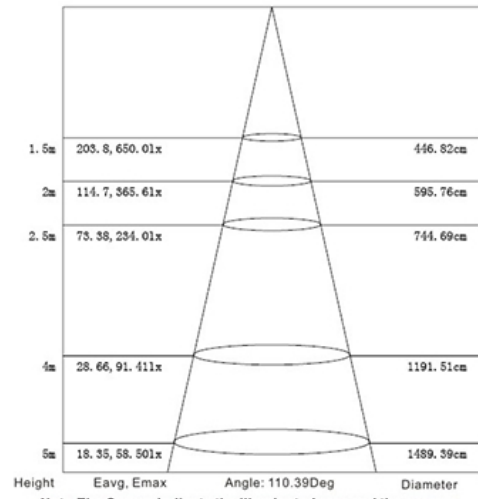

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

**WARRANTY**  
5-YEAR \*

Model:#	Description	wattage	lumens
CL50IDTF24/CW	50 Watt LED Indirect Troffer Cool White	50W	5000

\*Based on 3hours usage a day

UPC: 680596-583264

