



Commercial Downlight Wattage + CCT Selectable

5 CCT: 27/30/35/40/50K

Introducing EnVision LED's new Commercial Downlight with selectable wattage and color! Using EnVisions Select-N-Switch technology, easily select between a number of different wattages, and choose between 2700K, 3000K, 3500K, 4000K, and 5000K. Select 9 different color and lumen packages ALL-IN-ONE.

Mounting and Installation:

- Retrofit: cut-out ceiling size:
 6": 6-1/8" - 7- 3/16"
 8": 7-1/2" - 8-7/8"
 10": 9" to 10"
- This fixture does not fit into a recessed can. No housing required for remodel applications. Use a new construction plate for new construction. See Accessories on page 3.

Certifications:

- ETL Listed for USA and CA
- Energy Star Certified
- IC Rated and ASTM-E283 Air-Tight
- Meets CA Title 24 JA8 Requirement
- FCC CFR 47, FCC Part 15, Subpart B:2017
- 5 Year EnVision LED Limited Warranty

Whats Included:

- LED Fixture
- Junction Box Mounting Plate
- Mounting Screws
- Installation Guide

Detail Specification:

- Wet Location Location Rated
- CRI 90 LED Chip, R9>50
- 120-277V Driver, 50/60Hz
- 6" & 8": 80° Beam, 10": 90° Beam
- Operating Temperature: 0°F ~ +113°F
- PF >0.9, THD < 20%
- 0-10V Dimmable Down to 5%

Applications:

- Residential and Commercial Lighting
- New Construction or Remodel Use
- Recessed Lighting


Product Information:

- Select-N-Switch Technology
- Metal trim and module for better heat dissipation and longevity
- Various trim colors available
- PC lens reduces glare and optimizes even beam distribution
- Optional Emergency Backup Available: delivers full lumens in EM mode up to 25W
- L70 @ 50,000 Hours lumen maintenance



1 Product LED-CMD Commercial Downlight	2 Size/Watts 4-3M19 4 Inch (9/14/19W-750/1000/1500lm) 6-3M19 6 Inch (9/13/19W-800/1200/1600lm) 8-3M29 8 Inch (16.5/23/29W-1500/2000/2500lm) 10-3M38 10 Inch (21/30/38W-2000/2500/3300lm)	3 Color 5CCT Selectable 27K / 30K / 35K 40K / 50K	4 Voltage UNV 120-277V HV 347-480V	5 Emergency (Blank) None EMB 25W HV External
---	---	---	---	---

Specs and model numbers are subject to change with or without notice




Selectable Wattages

Change power wattage


Power Box

- Internal Flicker Free Driver
- 0-10V Dimming



5-CCT Selectable

Change color temp between 27/30/35/40/50K

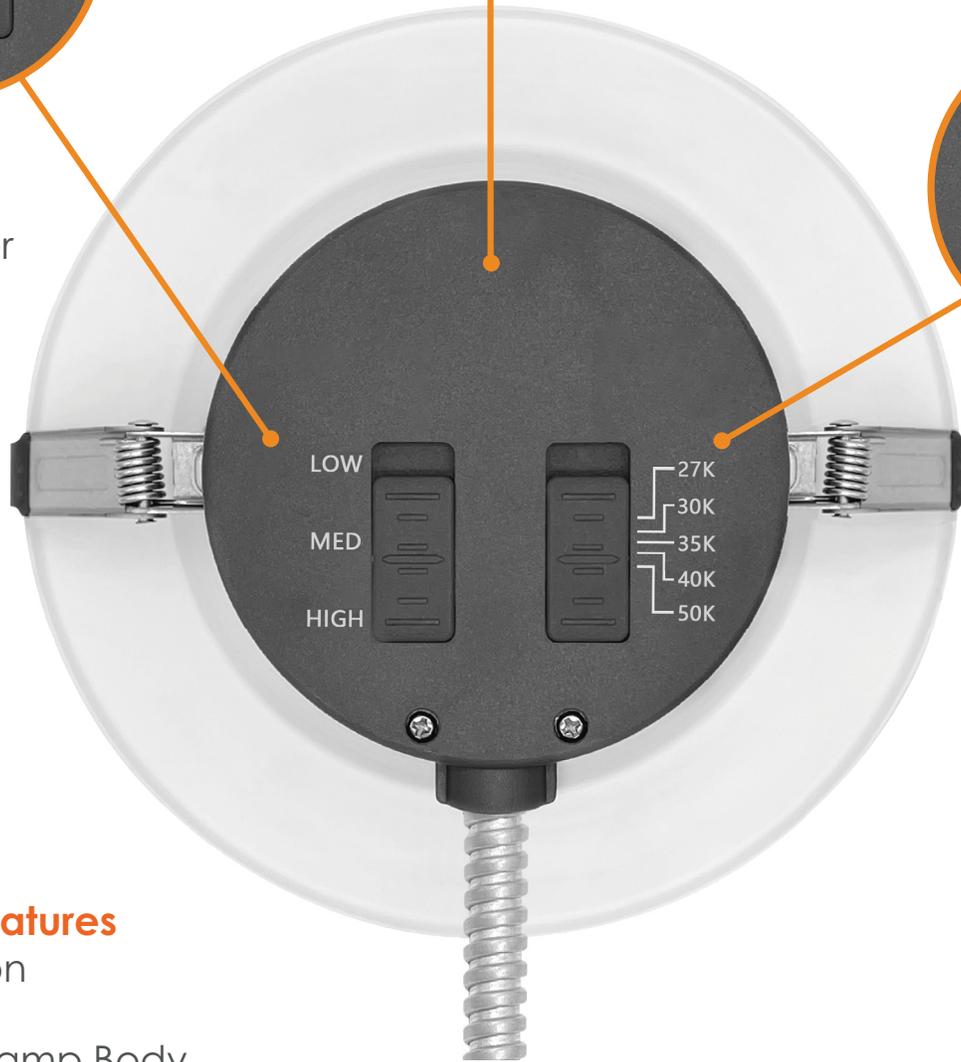

Additional Features

- Wet Location
- White Finish
- Aluminum Lamp Body
- Deep Reflector Design
- Low Glare




Carabiner Safety Clip



480V Step Down Transformer
4S Junction Box
 Optional Accessory Available

ACCESSORIES

TRIMS



CMD-TRIM-6-BLK-SM

6" Black Reflector

CMD-TRIM-8-BLK-SM

8" Black Reflector

CMD-TRIM-10-BLK-SM

10" Black Reflector

GCMD-TRIM-6-HZ-SM

6" Clear-Spectacle Haze Reflector

CMD-TRIM-8-HZ-SM

8" Clear-Spectacle Haze Reflector

CMD-TRIM-10-HZ-SM

10" Clear-Spectacle Haze Reflector

GOOF RINGS



GR-6-WH





6" Goof Ring, Inner Dim: 6.3" Outer Dim: 10.5"

GR-8-WH

8" Goof Ring, Inner Dim: 8" Outer Dim: 12.5"


GR-10-WH

10" Goof Ring, Inner Dim: 9" Outer Dim: 14.1"




DIMENSIONS

4 Inch

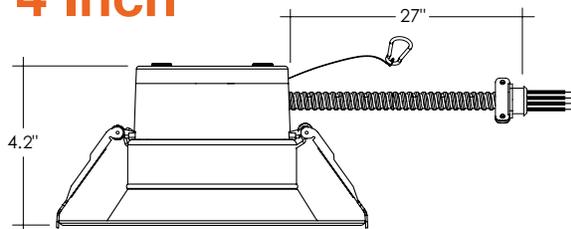


Cut Out Size: 4.9"

6 Inch

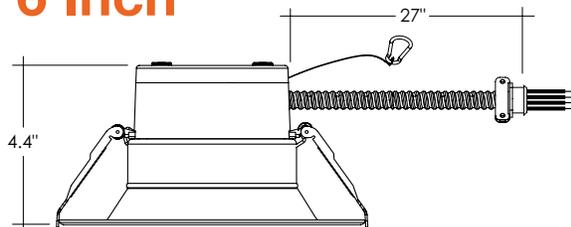


Cut Out Size: 6-1/8" - 7- 3/16"

8 Inch

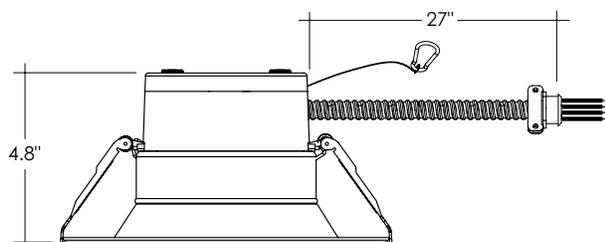

Cut Out Size: 7-1/2" - 8-7/8"

10 Inch

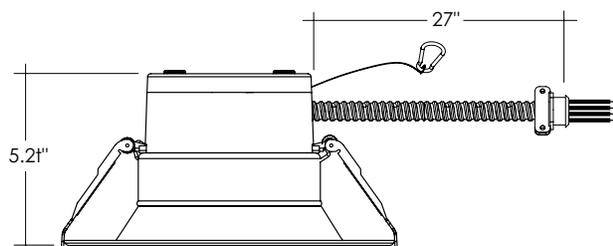

Cut Out Size: 9" to 10"

BOX & PLATES



JBOX-ALM

Junction Box (6 Knock-Outs)

C4-NC-RI-J-JBX

4" Commercial New Construction Plate with Joist Bar + J-Box

C6-NC-RI-J-JBX

6" Commercial New Construction Plate with Joist Bar + J-Box

C8/10-NC-RI-J-JBX

8/10" Commercial New Construction Plate with Joist Bar + J-Box

EMERGENCY BACK-UP



LED-EMB-25W-HV-0/10V

Emergency Back Up For Internal Drivers
(Works with all 0-10V Dim or <25W fixtures
-Single Sided Flex-