# 

Project: \_\_\_\_\_ Type: \_\_\_\_\_ Part #:



# **Commercial Downlight Wattage + CCT Selectable** 3 CCT: 30/40/50K

Introducing EnVision LED's new Commercial Downlight with selectable wattage and color! Usinged EnVisions Select-N-Switch technology, easily select between a number of different wattages, and choose between 3000K, 4000K, and 5000K. Select 9 different color and lumen packages ALL-IN-ONE.

## **Detail Specification:**


- Wet Location Location Rated
- CRI 90 LED Chip, R9>50
- 120-277V Driver, 50/60Hz
- 6" & 8": 80° Beam, 10": 90° Beam
- Operating Temperature: 0°F ~ +113°F
- PF >0.9, THD < 20%
- 0-10V Dimmable Down to 5%

### **Applications:**

- Residential and Commercial Lighting
- New Construction or Remodel Use
- Recessed Lighting

## **Product Information:**

- Select-N-Switch Technology
- Metal trim and module for better heat dissipation and longevity
- Various trim colors available
- PC lens reduces glare and optimizes even beam distribution
- Optional Emergency Backup Available: delivers full lumens in EM mode up to 25W
- L70 @ 50,000 Hours lumen maintenance

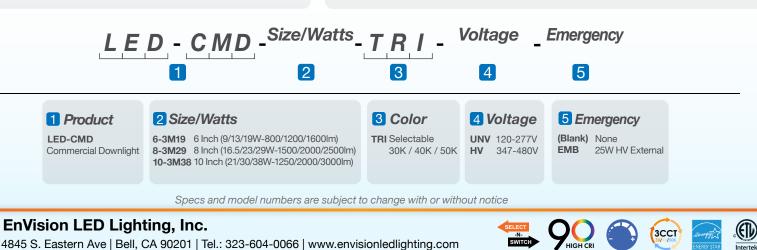

## Mounting and Installation:

- Retrofit: cut-out ceiling size: 6": 6-1/8" - 7- 3/16" 8": 7-1/2" - 8-7/8" 10": 9" to 10"
- This fixture does not fit into a recessed can. No housing required for remodel applications. Use a new construction plate for new construction. See Accessories on page 3.

## **Certifications:**


- ETL Listed for USA and CA
- Energy Star Certified
- IC Rated and ASTM-E283 Air-Tight
- Meets CA Title 24 JA8 Requirement
- FCC CFR 47, FCC Part 15, Subpart B:2017
- 5 Year EnVision LED Limited Warranty

# Whats Included:

- LED Fixture
- Junction Box Mounting Plate
- Mounting Screws
- Installation Guide

# 

# Commercial Downlight Wattage + CCT Selectable 3 CCT: 30/40/50K

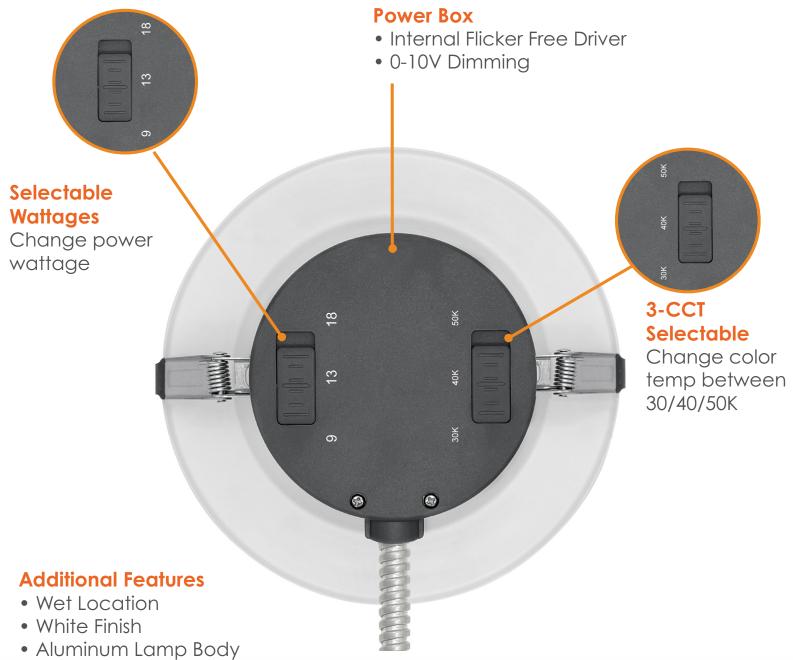

- Deep Reflector Design
- Low Glare



480V Step Down Transformer 4S Junction Box Optional Accessory Available

.



## EnVision LED Lighting, Inc.

4845 S. Eastern Ave | Bell, CA 90201 | Tel.: 323-604-0066 | www.envisionledlighting.com

# **En Visi®n LE D**

# Commercial Downlight Wattage + CCT Selectable 3 CCT: 30/40/50K

DIMENSIONS

# ACCESSORIES





CMD-TRIM-6-BLK-SM 6" Black Reflector CMD-TRIM-8-BLK-SM 8" Black Reflector CMD-TRIM-10-BLK-SM 10" Black Reflector



GCMD-TRIM-6-HZ-SM 6" Clear-Spectacle Haze Reflector CMD-TRIM-8-HZ-SM 8" Clear-Spectacle Haze Reflector CMD-TRIM-10-HZ-SM 10" Clear-Spectacle Haze Reflector

### **GOOF RINGS**





Cut Out Size: 6-1/8" - 7- 3/16"

GR-6-WH 6" Goof Ring, Inner Dim: 6.3" Outer Dim: 10.5" GR-8-WH 8" Goof Ring, Inner Dim: 8" Outer Dim: 12.5" GR-10-WH 10" Goof Ring, Inner Dim: 9" Outer Dim: 14.1"

### **BOX & PLATES**



JBOX-ALM Junction Box (6 Knock-Outs) C4-NC-RI-J-JBX 4" Commercial New Construction Plate with Joist Bar + J-Box

C6-NC-RI-J-JBX 6" Commercial New Construction Plate with Joist Bar + J-Box


C8/10-NC-RI-J-JBX

8/10" Commercial New Construction Plate with Joist Bar + J-Box


### **EMERGENCY BACK-UP**



LED-EMB-25W-HV-0/10V Emergency Back Up For Interal Drivers (Works with all 0-10V Dim or <25W fixtures -Single Sided Flex-




# 8 Inch



Cut Out Size: 7-1/2" - 8-7/8"

# 10 Inch

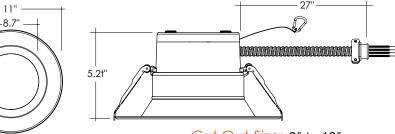

Cut Out Size: 9" to 10"