

Project: _____
 Part#: _____
 Type: _____

3" SnapTrim Adjustable Downlight

5CCT Selectable: 27/30/35/40/50K



EnVision LED has developed a line of 3" SnapTrim Downlights that eliminates the need for a can. The external remote junction box mounts inside the ceiling and the fixture is IC Rated. By reducing material cost and installation time, the EnVision SnapTrim is the ideal retrofit or new construction recessed lighting solution yet. Simply cut a hole in the ceiling, power the J-Box to the wall switch, and "snap" the trim flush. Now available with 5CCT color changing technology! Switch from 27K, 30K, 35K, 40K, and 50K with the flick of a switch!

Applications:

- Residential or Commercial Lighting
- New Construction or Remodel use
- General recessed lighting

Certifications:

- ETL Listed for USA and CA
- Energy Star Certifies
- IC Rated and ASTM-E283 Air-Tight
- CA Title 24 JA8-2019 CEC Listed
- FCC CFR 47, FCC Part 15, Subpart B:2017
- 5 Year EnVision LED Limited Warranty

Detail Specifications:

- IP65 Wet Location Rated
- CRI 93 COB LED Chip, R9>50
- 120V Driver
- 40° Beam Angle
- Operating Temperature: 0°F ~ +113°F
- PF >0.9
- Cut Out Dimension: 3-3/8"
- Triac and ELV Dimmable down to 5%

Product Information:

- 5CCT Selectable: 27/30/35/40/50K
- Available in white or black round finish
- SnapTrim Canless: Spring clips with j-box eliminates can
- Optional Emergency Backup Available: delivers full lumens in EM mode
- L70 @ 50,000 Hours lumen maintenance

Mounting:

- No can needed in remodel applications, tension clip springs clamp into 1/2" to 1.5" thick ceiling
- Pre-wired junction box with circuit wiring built in (3 in / 3 out)
- New construction rough-in plate or mounting plate with joist bars available (See accessories listed below)

Whats Included?:

- LED Module
- Junction Box
- Cut Out Template
- Mounting Screws
- Installation Guide

L E D - D L J B X - A D J - 3 - 8 W - 5 C C T - *Finish* *Trims* *Accessory* *EMB* *Warranty*

1 Product	2 Size/Watts	3 Color	4 Finish	5 Trims	6 Accessory	7 EMB	8 Warranty
LED-DLJBX-ADJ	3-8W 3 Inch / 8W / 600 lm	5CCT 27/30/35/40/50K	WH White BLK Black BN Brushed Nickel	WH-SQ White Square BN-R Brushed Nickel Round BN-SQ Brushed Nickel Square BLK-R Black Round BLK-SQ Black Square	CUNV JBX-9W EXT-6 EXT-10 SWF	Universal Mounting Plate HV Driver (200-347V, 9W) 6' Extension Cable 10' Extension Cable Wi-Fi Control	(Blank) Emergency Backup (Blank) 5 Years (incl.) 10YR 10 Years

Specs and model numbers are subject to change with or without notice

FEATURES

Easy Installation

Simply snap downlight into the hole that has been cut into ceiling for an easy install.

High Quality LEDs


50,000 hour life with a 40° beam angle make these downlights perfect for any construction project.

Detachable Color Trims

Choose between a selection of different changable trims, between round or square black, bronze, and white square.

Dimmable

Set the mood right with a 5-100% dimming light

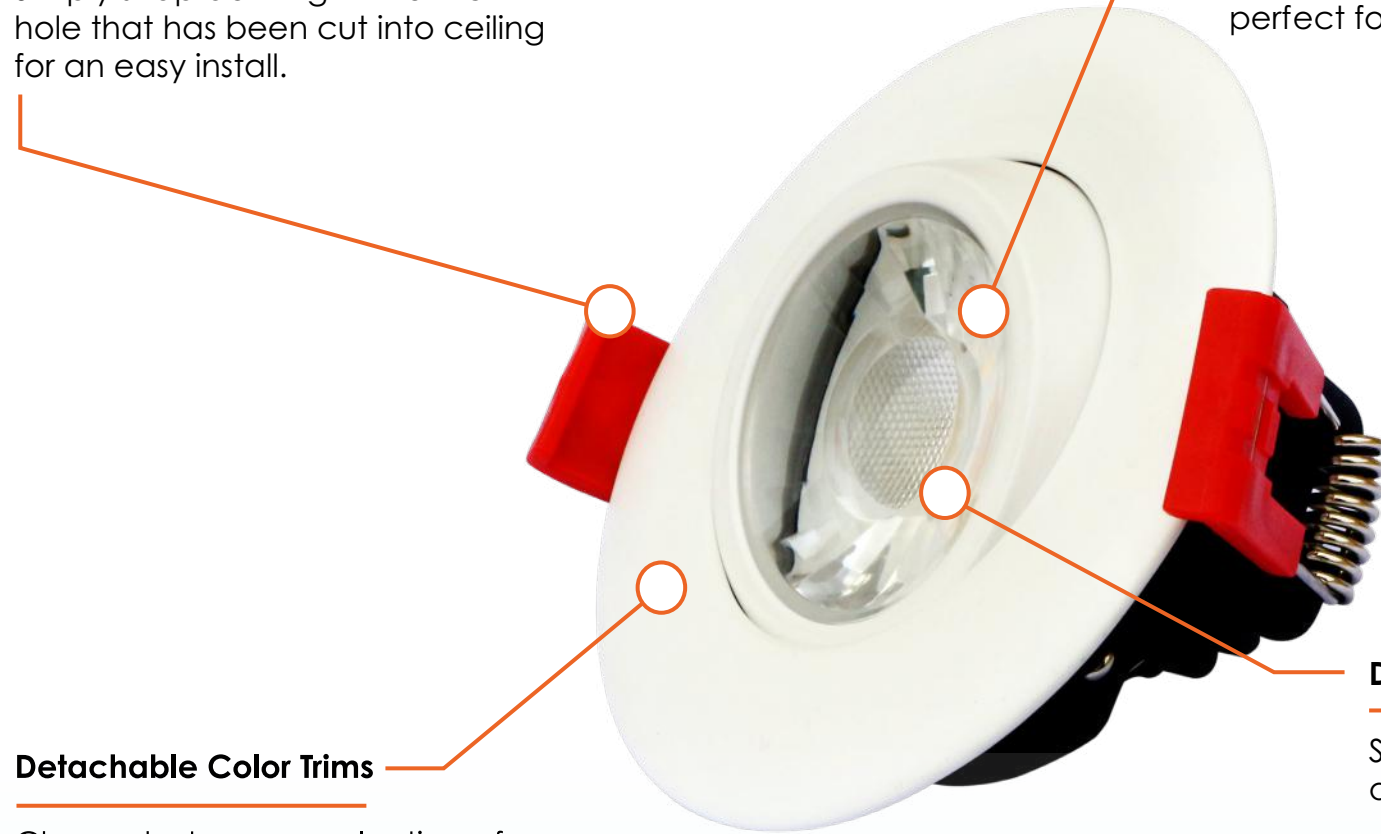

Hole Cut Size **3^{3/8}" (79.38mm)**

OPTIONAL ACCESSORIES



CUNV-NC-ICAT

New Construction Plate


Makes new construction installation easier. Universal plate compatible for 2", 4", 6" trims with J-Boxes.



C4-JBX-RI

4" Rough-In Plate

Make installation even easier with this rough-in plate.



**JBX-JUMP-
(4'/10'/20')**

Connector Extension Cord

Extension cord in between driver and downlight. Available in 4', 10', 20' lengths.

Accessory Model	Description
CUNV-NC-ICAT	2/4/6" New Construction Plate
C4-JBX-RI	4" Rough-In Plate
JBX-JUMP-4'	4' Connector Extension Cord
JBX-JUMP-6'	6' Connector Extension Cord
JBX-JUMP-10'	10' Connector Extension Cord

DIMMER COMPATIBILITY				
Brand	Series	Model	Load	Dimmability
Lutron	Ariadni	AYCL-153P	150W	OK
	Diva	DV-600PR	600W	OK
	Diva	DVCL-153P	150W	OK
	Maestro	MACL-153MH	600W	OK
	Maestro Wireless	MRF2-6CL	150W	OK
	Rotary	D-600P	600W	OK
	Electronic(ELV)	NTELV-300P	600W	OK
	Skylark	S-600P	600W	OK
	Skylark Contour	CT-600P	600W	OK
	Skylark Contour	CTCL-153P	150W	OK
	Toggler	TG-600P	600W	OK
Toggler	TGCL-153P	150W	OK	
Leviton	Sureslide	6633	600W	OK
	Sureslide Decora	6674	600W	20-100%
	Trimatron	6602	600W	20-100%
	ILLVMATECH	IPL06	600W	OK
Legrand	Adorne	ADTP703TU	700W	20-100%
	Harmony	H703PTW	700W	OK
Cooper	Aspire	9540	1000W	OK
	Devine	DAL06P	300W	OK

DIMENSIONS

