

### Key Features & Benefits:

- Quick Connect Technology
  - No need to worry about shunted or non-shunted tombstones
  - Extremely fast installation
  - No power though the pins
  - Power through the cord
- Interchangeable End Caps – Designed to Work With any Tombstone
  - G13 (Standard)
  - Fa8 (Single Pin)
  - R17D (HO)
- Long Life 80,000 Hours (L70)
  - 10 year warranty (12 hour run times)
  - 7 year warranty (24 hour run times)
- Universal Input 120-277V; 50/60Hz External Driver
- Glass Free
- Vibration and Impact Resistant
- No UV Emission
- Suitable for Dry and Damp Locations



G13 (Standard)



Fa8 (Single Pin)



R17D (HO)




Project: \_\_\_\_\_

Date: \_\_\_\_\_

Catalog #: \_\_\_\_\_

Notes: \_\_\_\_\_

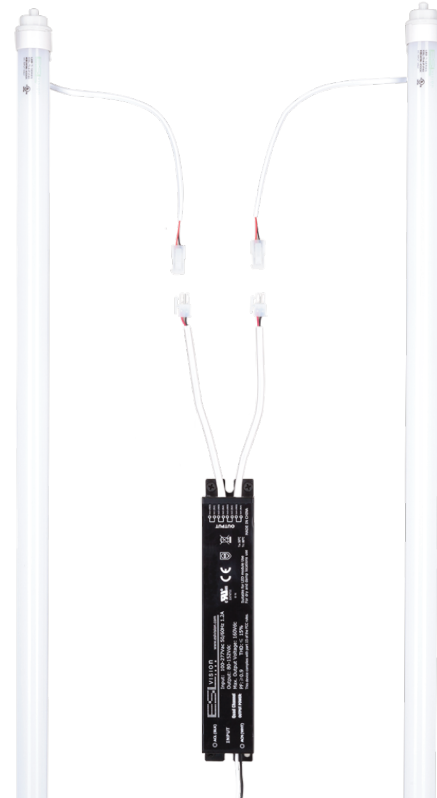

\*Standard endcap

### Electrical Data:

#### Light Specifications:

Lumens Per Lamp: Up to 3,901 Lumens  
 Efficacy (lm/W): Up to 134 Lumens per Watt  
 Kelvin: 3000K, 3500K, 4000K, 5000K  
 Color Rendering Index (CRI): >82  
 Rated Life: > 80,000 hrs

#### Driver Data:

Input Voltage: 120-277 VAC  
 Driver Output: Dual Output  
 Output Power: 30 Watts per Lamp (60 Watts Total)  
 Input Current @ 120V: 0.5 Amps  
 Input Current @ 240V: 0.25 Amps  
 Input Current @ 277V: 0.217 Amps  
 Total Harmonic Distortion (THD): <10%  
 Operating Temperature: -4 ~ 122°F

### Catalog Data:

ITEM#	WATTS PER LAMP	LUMENS PER LAMP	EFFICACY (lm/W)	KELVIN	DLC QPL CODE
ESL-Ti-8-S-30W-2L-F30	30W	3,844	130	3000K	PFUU73FA
ESL-Ti-8-S-30W-2L-F35	30W	3,858	131	3500K	P3WTNYMI
ESL-Ti-8-S-30W-2L-F40	30W	3,873	132	4000K	PW6WIW2U
ESL-Ti-8-S-30W-2L-F50	30W	3,901	134	5000K	PCI0FVKJ

### Ordering Guide:

<b>ESL</b>	<b>Ti</b>	<b>8</b>	<b>S</b>	<b>30W</b>	<b>2L</b>	<b>F</b>	
ESL	TYPE	LENGTH	CLASS	WATTS	LAMP	LENS	KELVIN
	Ti Series	8 (Eight Feet)	S	30W (30 Watts) 36W (36 Watts)	1L (One Lamp) 2L (Two Lamp)	F (Frosted)	30 (3000 Kelvin) 35 (3500 Kelvin) 40 (4000 Kelvin) 50 (5000 Kelvin)

### Endcap Options:

<b>ENDCAP</b>
ENDCAP

ESL-Ti-G13  
ESL-Ti-Fa8\*  
ESL-Ti-HO

\*Standard endcap - Only DLC approved product


### Alternate Ti Options:



1L Output

### Dimensions:

#### Ti:

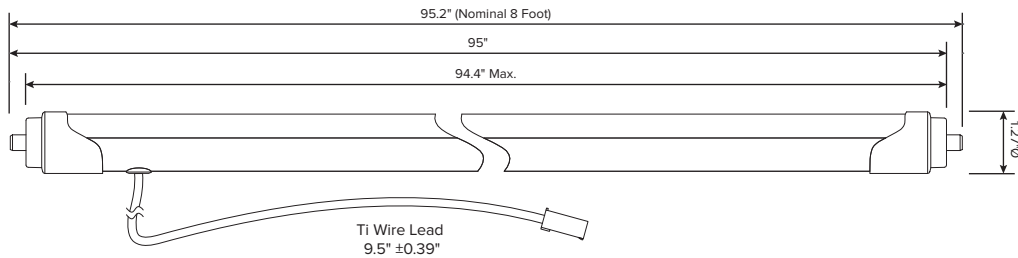

#### Driver:

