

Key Features & Benefits:

- DLC Listed 2x4 Troffer Retrofit Kit
- Installs in Minutes
 - Magnetic Clips
 - Hex Tek Screws
- 54 Available 2x4 Retrofit Kits
 - 24 Available 2x2 Retrofit Kits
 - 36 Available 1x4 Retrofit Kits
- 2,779 to 12,639 Troffer Kit Lumens
- 3,328 to 14,280 Linear Ambient Kit Lumens
- Long Life 80,000 Hours (L70)
 - 10 year warranty (12 hour run times)
 - 7 year warranty (24 hour run times)




Project: _____

Date: _____

Catalog #: _____

Notes: _____

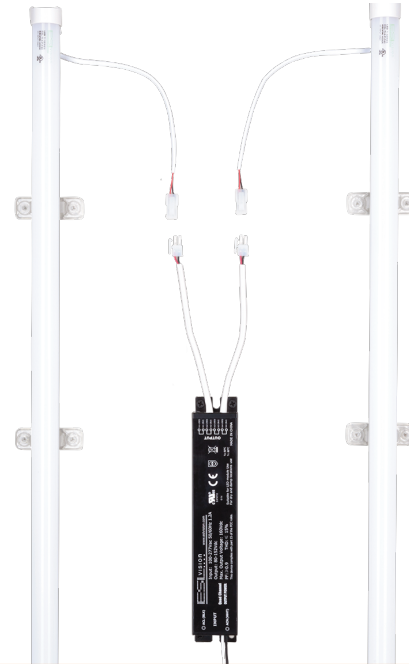


Technical Data:

Light Specifications:

- Linear Ambient Kit Lumens: Up to 8,525 Lumens
- Linear Ambient Kit Efficacy (lm/W): Up to 143 Lumens per Watt
- Troffer Kit Lumens: Up to 6,693 Lumens
- Troffer Kit Efficacy (lm/W): Up to 111 Lumens per Watt
- Kelvin: 4000K, 5000K
- Color Rendering Index (CRI): >82
- Rated Life: > 80,000 hrs

Driver Data:

- Input Voltage: 120-277 VAC
- Driver Output: Dual Output
- Output Power: 60 Watts
- Input Current @ 120V: 0.5 Amps
- Input Current @ 240V: 0.25 Amps
- Input Current @ 277V: 0.217 Amps
- Total Harmonic Distortion (THD): <10%
- Operating Temperature: -4 ~ 122°F



DLC QPL Application Listing:

ITEM#	TROFFER APPLICATION	DLC QPL CODE
ESL-TiHO-K24-S-60W-2L-F40	Linear Retrofit Kit for 2x4 Luminaires	PQAGRWXW
ESL-TiHO-K24-S-60W-2L-F50	Linear Retrofit Kit for 2x4 Luminaires	PF4ARRUY

ITEM#	LINEAR AMBIENT APPLICATION	DLC QPL CODE
ESL-TiHO-K24-S-60W-2L-F40	Retrofit Kit for Direct Linear Ambient Luminaires	PZSP06CX
ESL-TiHO-K24-S-60W-2L-F50	Retrofit Kit for Direct Linear Ambient Luminaires	PVT25F9I


Catalog Data:

ITEM#	WATTS	KELVIN	TROFFER KIT LUMENS	TROFFER KIT EFFICACY (lm/W)	LINEAR AMBIENT KIT LUMENS	LINEAR AMBIENT KIT EFFICACY (lm/W)
ESL-TiHO-K24-S-60W-2L-F40	60W	4000K	6,616	110	8,461	142
ESL-TiHO-K24-S-60W-2L-F50	60W	5000K	6,693	111	8,525	143

Ordering Guide:

ESL	TiHO	K24	S	60W	2L	F		
ESL	TYPE	SERIES	CLASS	WATTS	Ti	LENS	KELVIN	OPTIONS
	TiHO Series	K24 (2x4 Kit)	S	60W (60 Watts)	2L (Two Ti)	F (Frosted)	40 (4000 Kelvin) 50 (5000 Kelvin)	

Alternate 2'x4' Ti Kit Options:

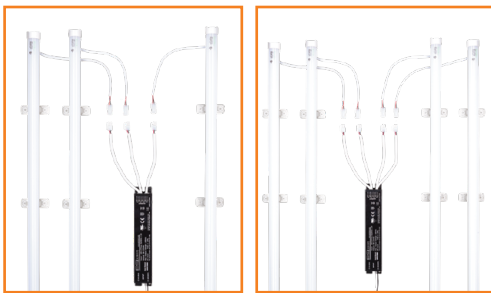

3L Output

4L Output

What's Included:


- (2) LED Ti Bars
- (1) LED Driver
- (4) Ti Clips with Rare Earth Magnets
- (8) Self Tapping Screws
- (1) UL1598C Certification Label

Options (Add as Suffix):


- ESL-EMG-4DC-9W (Emergency Back Up, DC, 9 Watt)

Dimensions:

Ti:

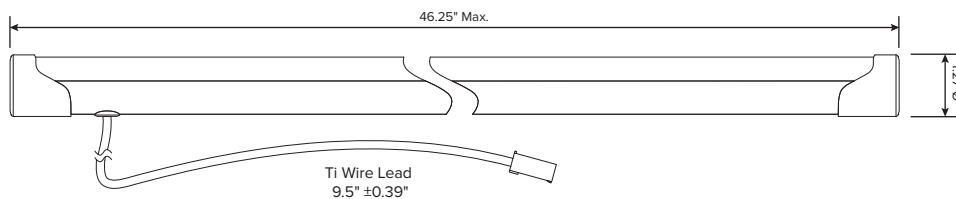

Clip:

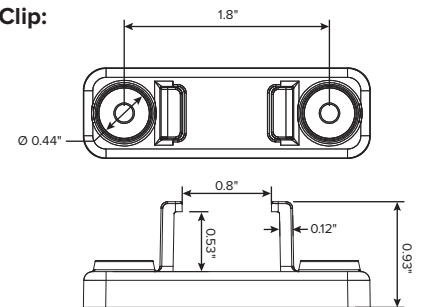

Driver:

