

A complement to any commercial or residential space, the Patrícia–5 seamlessly combines innovation with simple, refined design. Its elegant aesthetic belies its robust construction. Solid wood walnut or barn wood tone blades revolve around a balanced, cylindrical DC motor housing. Air is circulated efficiently with barely more than a whisper. An eco-conscious LED light kit completes the package, making Patrícia–5 sophisticated, efficient and green. Constructed of cast aluminum and heavy stamped steel, the Patrícia–5 carries a limited lifetime warranty.



SKU NAMING CONVENTION							
SKU#	PA5-XX-XX-XX (Model+Finish+Blade	e+Diameter)					
Standard Finishes	Brushed Nickel Polished Chrome Textured Bronze Gloss White Matte Black	- BN - CR - TB - WH - BK					
Blade Finish	Barn Wood Tone Walnut Tone	- BW - WA					
Fan Diameter	42 inches / 107 cm 52 inches / 132 cm 60 inches / 152 cm	- 52					

STANDARD EQUIPMENT

One downrod of 10 inches / 13 cm

Vaulted ceiling canopy for up to 30°

Light cover

6-speed RF remote control with reverse function in black



Wireless Decora-style, 6-speed, wall control in white




WARNING: Only compatible with included controllers.

CEILING HEIGHT / DOWNROD TABLE						
Ceiling Height	Downrod Lengths Field cuttable. Non-threaded					
10 ft or less	5 inches / 13 cm					
10 -12 feet	10 inches / 25 cm					
13 feet	20 inches / 51 cm					
14 feet	30 inches / 76 cm					
15 feet	48 inches / 122 cm					
16 feet +	72 inches / 183 cm					

CEILING PITCH TABLE					
0/12	0 degrees				
1/12	4.76 degrees				
2/12	9.46 degrees				
3/12	14.04 degrees				
4/12	18.43 degrees				
5/12	22.62 degrees				
6/12	26.57 degrees				
7/12	30.26 degrees				
8/12	33.69 degrees				
9/12	36.87 degrees				
10/12	39.81 degrees				
11/12	42.51 degrees				

Patrícia-5

TECHNICAL SPECIFICATIONS

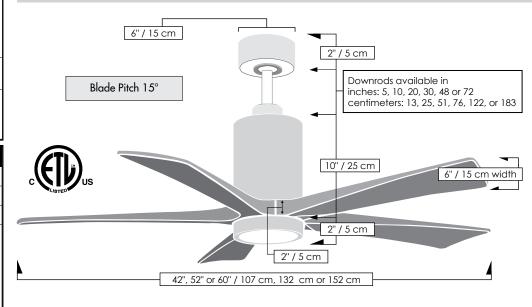

FAN SPECIFICATIONS										
Fan Diameters			inches: 42, 52 or 60 centimeters: 107, 132 or 152							
Ove	Overall Drop			14 inches / 36 cm + downrod length						
Fai	Fan Weight			19 lbs						
Downrods Lengths Field cuttable. Non-threaded			inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76,122,183							
Downrod Diameter			1 inch							
Voltage		tage	110 or 220							
Мс	Motor Type		DC							
Environment		Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible								
Ar	Ambience		Silent							
Safety Certification		ation	ETL / CETL							
Warranty		ranty	Limited Lifetime							
NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA										
		42 inc	ch / 107 cm	52 ir	52 inch / 132 cm		60 inch / 152 cm			
RPM (Low / High	h)	5	53 / 221		51 / 186		51 / 87			
CFM (Low / High	h)	917 / 4386		1398 / 5524			3247 / 5547			
Watts (High	h)	30.47		31.80			31.64			
CFM/Watt (High	h)	143.94		173.71			175.31			
Blade Pitc	ch	15°			15°		15°			
LIGHT KIT PHOTOMETRICS										
Lamping (Replaceable)		mote mable	Delivered Temperature in K		Delivered Lumens	CRI	Watts	Hours		
Integrated LED		Yes	3075		690	90	16	60,000		
Light kit longevity if used 6 Hours/Day: 27.4 Years										

Matthews Fan Company

1881 Industrial Drive Libertyville, IL 60048 Tele: 847.680.9043 Fax: 847.680.8140

www.matthewsfanco.com
© 2019 Matthews Fan Company. All rights reserved.

