

## *PLF Hydronic Electric Baseboard Heaters*



### THE HYDRONIC STORY:



The electric heating element is partially submerged in an inert heat transfer fluid totally sealed in a large 7/8" diameter copper tube spanning the length of the heater. This thermal mass transfers heat evenly across the entire length of the heater. The PLF series provides uniform warmth with longer heat retention and minimal temperature variation.

For optimum performance, use a wall mounted digital thermostat to maintain comfortable room temperature.

### ▶ APPLICATIONS INCLUDE:

- NEW HOME CONSTRUCTION
- REMODELING OR ROOM ADDITIONS
- APARTMENTS
- CONDOS
- LIGHT COMMERCIAL

### ▶ DURABLE NAVAJO WHITE TEXTURED POLYESTER POWDER COAT FINISH

### ▶ EFFICIENT HEAT DISSIPATION

- LARGE ALUMINUM HEATING FINS DELIVER A STEADY CONVECTION FLOW

### ▶ EASY INSTALLATION

- HEATER MOUNTS FLUSH TO WALL AND FLAT ON WOOD, TILE, OR CARPET
- PRE-NOTCHED GUIDE MARKS IN CABINET REAR
- POWER SUPPLY CONNECTION CAN BE MADE AT EITHER END OF BASEBOARD

### ▶ SAFE OPERATION

- LOW OPERATING SURFACE TEMPERATURES
- SAFETY CUTOUT SHUTS DOWN HEATER IN THE EVENT OF OVERHEATING

### ▶ BRAND YOU KNOW AND TRUST

- 10-YEAR LIMITED WARRANTY ON ELEMENT
- OVER FOUR DECADES OF ELECTRIC HYDRONIC EXPERIENCE




## SELECTION CHART

CATALOG NUMBER	UPC 6 85360	VOLTS	WATTS	BTU/HR	AMPS	LENGTH	SHIP WEIGHT (lbs.)
PLF500	03577 2	120	500	1706	4.2	28 inches	10
PLF504	03578 9	240/208	500/375	1706/1280	2.1/1.8	28 inches	10
PLF750	03581 9	120	750	2560	6.3	34 inches	12
PLF754	03582 6	240/208	750/563	2560/1921	3.1/2.7	34 inches	12
PLF1000	03562 8	120	1000	3413	8.3	46 inches	15
PLF1004	03563 5	240/208	1000/750	3413/2560	4.2/3.6	46 inches	15
PLF1250	03566 6	120	1250	4265	10.4	58 inches	19
PLF1254	03567 3	240/208	1250/938	4265/3200	5.2/4.5	58 inches	19
PLF1500	03570 3	120	1500	5120	12.5	70 inches	22
PLF1504	03571 0	240/208	1500/1125	5120/3839	6.3/5.8	70 inches	22
PLF2004	03574 1	240/208	2000/1500	6826/5120	8.3/7.2	94 inches	30

## Accessories


CATALOG NUMBER	UPC 6 85360	DESCRIPTION	SHIP WEIGHT (lbs.)
PT2DS	04606 8	25 amp @ 120-277 VAC, Double Pole Snap Action Thermostat Assembly. Comes Assembled to End Cap	1

## FEATURES

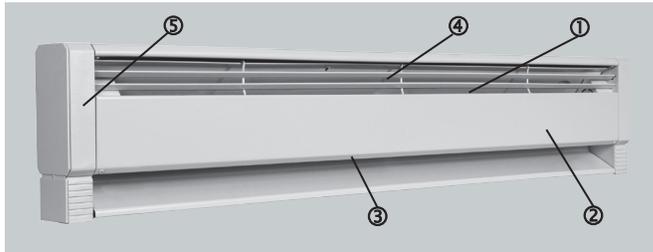

- ① Hydronic Element
- ② Built-in wireway
- ③ Durable texture polyester powder coat finish
- ④ Heavy-duty steel louvered grilles discourage insertion of foreign objects and direct heat outward
- ⑤ Large wiring compartment

## DIMENSIONS

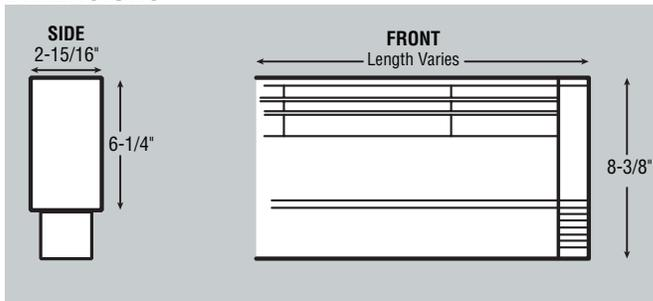

All knockouts are 7/8" diameter for 1/2" conduit