


REL20 Series

120/277V

Catalog #:		Type
Project:		Date
Prepared by:		

Compact Emergency

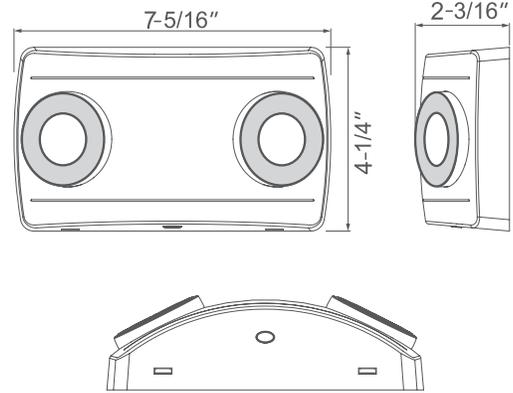

REL20 - Compact Emergency

DESCRIPTION

Simple and compact, this emergency unit is very versatile with options for lenses for wide and narrow light distribution and cold weather applications. The adjustable lenses allow you to make sure the light goes where you want.

DESIGN FEATURES

Construction

- White thermoplastic housing
- Adjustable Clear Lens Heads

Electrical

- 120/277V, 60Hz
- Standard Operating Temperature: 10°C (50°F) to 40°C (104°F)
- Cold Weather Option Operating Temperature: -10°C (14°F) to 40°C (104°F)
- Adjustable Heads: 2 x 1W | 160 lms total
- Standard Battery: 3.6V, 900 mAh Ni-Cad
- Cold Weather Battery: 3.6V, 1500 mAh Ni-MH
- Manual test switch and LED indicator
- 90 minutes of illumination in case of power failure

Installation

- Suitable for ceiling and wall mount over standard recessed J-Box configuration
- A wide focal lens for open area or a narrow focal lens for long pathway applications

Dimensions

- 7-5/16" W x 2-3/16" D x 4-1/4" H

Certifications

- UL Listed for damp location to UL924 standards
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

ORDERING GUIDE

Example: REL20-N

Model #	Options
REL20	
REL20	: Wide focal lens -N : Narrow focal lens -C : Cold weather option

TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.



LED Lamp

Other Components

3/10/22 R2



RP | LIGHTING · FANS

REL20 Series

120/277V

Spacing Information

