

DUPLEX RECEPTACLE TAMPER-RESISTANT

ELECTRIFYING YOUR WORLD
WITH SAFETY IN MIND

Available in 15A or 20A Duplex Style models

Available in Regular or Decorator style

Spring-loaded shutter system improves safety by blocking insertion of foreign objects

Removable screw hole mounts enable custom fittings in existing electrical boxes

3-Wire setup with GREEN ground screw. Use with Copper Wire only

15A: Quick-wire Push-in and side-wire; 20A: Side-Wired installation


Includes strap with removable ears to simplify product installs

Suitable for standard residential and commercial grade applications

Fits most standard sized wall plates (wall plate not included)

Tested to meet UL498, CSA, and NEC standard compliant

Environmental: flammability UL94, V2 Rating

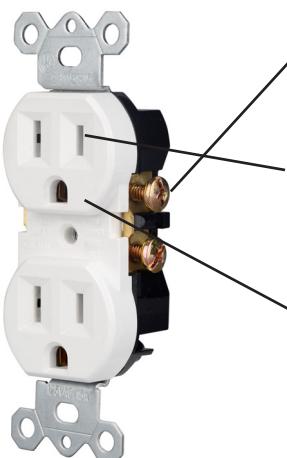

Features

Removable Mounting Screw
Mounts enable custom fitting in any existing wiring boxes.

Spring-loaded shutter keep children and animals safe by blocking access to anything other than two- or three-pronged plugs.

Quick and easy installation in new or existing electrical boxes for residential and commercial grade use.

WARRANTY: 2 Year Warranty



SERE01AS-TR-W



SERE01BS-TR-W



Duplex Receptacle Tamper-Resistant

PRODUCT SKU	DESCRIPTION	AMPS	VOLTS	NEMA
SERE01AS-TR-W	15A DUPLEX TAMPER RESISTANT RECEPTACLE	15A	125VAC	5-15R
SERE01BS-TR-W	20A DUPLEX TAMPER RESISTANT RECEPTACLE	20A	125VAC	5-20R
SERE02AS-TR-W	15A DECORATOR TAMPER RESISTANT RECEPTACLE	15A	125VAC	5-15R
SERE02BS-TR-W	20A DECORATOR TAMPER RESISTANT RECEPTACLE	20A	125VAC	5-20R

AMPERAGE

- 15 amp
- 20 amp

VOLTAGE

125VAC

NEMA

- 5-15R
- 5-20R

POLES

2-Pole

STYLES

- Duplex
- Decorator

WIRING TYPE

- Quick-Wired Push-in
- Side Wired

PRODUCT DIMENSION

4.09 x 1.57 x 1.65 in

MATERIAL

Polycarbonate

FOR ADDITIONAL TECHNICAL INFORMATION

Email us at:
sales@tolleaamerica.com

IN NEED OF MORE INFO?

Visit our website at:
www.tolleaamerica.com
or scan the QR code



SPECIFICATIONS SUBMITTAL

Job Name

Job Number

Notes